

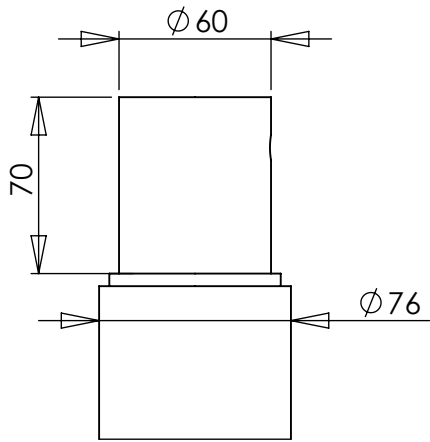


CAPACITIES (m²) TUBRET 114/76 RANGE FLEXITY (Weight on top 30kg)											
Height (m)	Poles weight (kg)	Zone 1		Zone 2		Zone 3		Zone 4		cyclon zone	
		22 m/s		24 m/s		26 m/s		28 m/s		34 m/s	36 m/s
		Cat II	Cat I	Cat II	Cat I	Cat II	Cat I	Cat II	Cat I	Cat I	Cat I
3	24,2	2,32	1,98	1,92	1,65	1,62	1,38	1,37	1,17	0,77	0,68
3,2	25,4	2,15	1,81	1,79	1,5	1,51	1,27	1,29	1,08	0,71	0,63
3,5	27	1,87	1,53	1,54	1,25	1,28	1,05	1,09	0,88	0,57	0,5
4	29,8	1,47	1,16	1,22	0,95	1,01	0,8	0,85	0,67	0,42	0,37

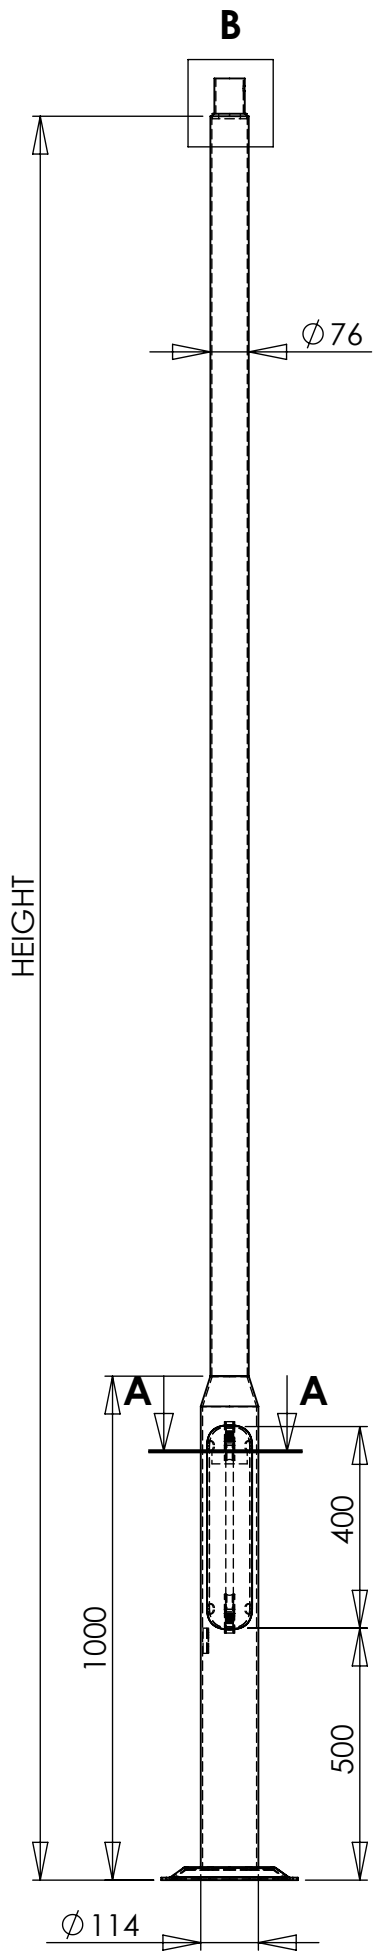


DETAIL B
SCALE 1 : 3

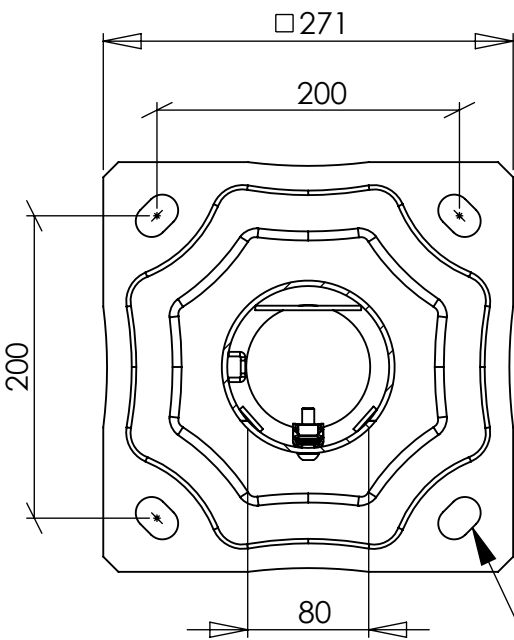


Service square
63x70

4 slotted holes for anchor
bolts Ø16 M14x300

SECTION A-A
SCALE 1 : 5

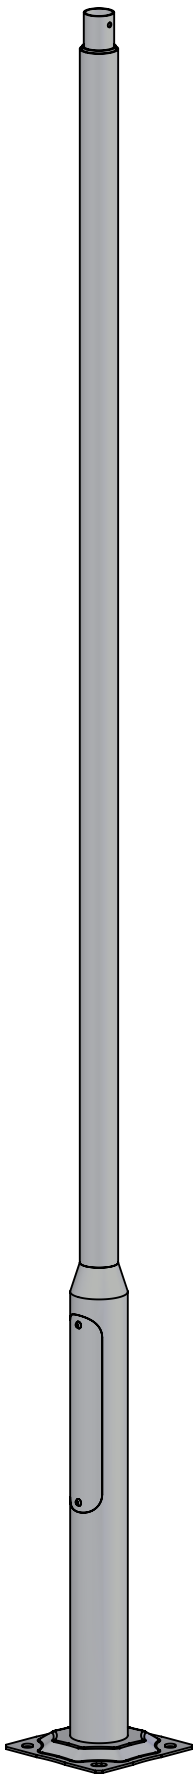

A	Crochet	16/09/2019	Drawing in english , add height 3.2m			D.Souchon	16/09/2019
REV	CRÉÉ	DATE	DESCRIPTION			VÉRIFIÉE	DATE
	Crochet	25/07/2019	CREATE A LAYOUT			D Souchon	25/07/2019
zumtobel group						COPY OR PROHIBITED COMMUNICATIONS DIMENSIONS MILLIMETER	SHEET : 1/1
MATERIAL :		CUSTOMER : RANGE FLEXITY				CALCULATION NUMBER :	PART NUMBER :
FINISH : Brut		TUBRET Ø114/76 Spigot Ø60x70 PRESENTATION DRAWING				DRAWING NUMBER :	
GENERAL TOLERANCE ± :		A3		SCALE 1:20		FR2010	H62286-1000 C 1
							A