



A slim LED batten with contemporary design that provides great lighting quality for the application


- Unobtrusive and slim luminaire that integrates easily into the environment
- Elegant luminaire with minimalistic design
- Seamless lit-line with L and T connection possible as well as suspension
- Flexibility and ease of installation (quick electrical connector)
- Low cost of ownership

Application

- Office surrounding areas
- Break-out zones
- Decorative applications

Light source Information

- Life time 50 000 hours L70B50 Ta 25C
- 1 050lm (9W), 2 100lm(18W), 4 200lm(37W), 120Llm/W@4000K
- Colour temperature 3000K, 4000K
- CRI 80
- McAdams 4

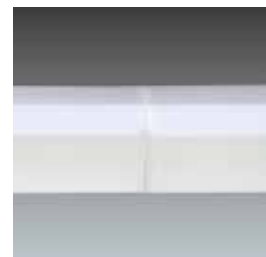

'l' type connection





'l' type connection



'T' type connection

Overview



Standards

650°C  IP20

 T_a25

Lamps

 120
Lm/W



Luminaire L1180



Electrical connector



I Bracket



T Bracket



Luminaire L580



Side feed-in cable



L Bracket



Suspension kit

Ordering Guide

Complete luminaires supplied with optic, LED, driver and surface mounting kit.

Description	Wt (kg)	SAP Code
Mains cable back feed-in		
Fixed output		
EQUAMINI L580 LED950-830	0.53	22660806
EQUAMINI L1180 LED1900-830	1.04	22660808
EQUAMINI L580 LED1050-840	0.53	22660811
EQUAMINI L1180 LED2100-840	1.04	22660812
DALI dimmable		
EQUAMINI L580 LED1900-830 HFX	0.69	22661227
EQUAMINI L1180 LED3800-830 HFX	1.08	22661228
EQUAMINI L580 LED2100-840 HFX	0.69	22661229
EQUAMINI L1180 LED4200-840 HFX	1.04	22661231
Mains cable end-cap side feed-in		
Fixed output		
EQUAMINI L580 LED950-830 END	0.53	22660814
EQUAMINI L1180 LED1900-830 END	1.04	22660816
EQUAMINI L580 LED1050-840 END	0.53	22660830
EQUAMINI L1180 LED2100-840 END	1.04	22660823
DALI dimmable		
EQUAMINI L580 LED1900-830 HFX END	0.69	22661240
EQUAMINI L1180 LED3800-830 HFX END	1.08	22661232
EQUAMINI L580 LED2100-840 HFX END	0.69	22661233
EQUAMINI L1180 LED4200-840 HFX END	1.04	22661234
Accessories		
EQUAMINI ELECTRICAL CONNECTOR		22660825
EQUAMINI SIDE FEED IN CABLE 300MM		22660826
EQUAMINI SUSPENSION KIT PAIR 1500		22661235
EQUAMINI I BRACKET		22660831
EQUAMINI L BRACKET		22660840
EQUAMINI T BRACKET		22660832


HF Fixed output
HFX DALI

Materials/Finish

Body: extruded aluminium with anodised finish
Diffuser: opal polycarbonate
End-cap: polycarbonate with integrated socket system

Installation/Mounting

Suitable for surface or suspended mounting.
Electrical connection to terminal block via flap in rear of body or from end-cap side via electrical connector.
Continuous linking possible. Max. 10 pcs.

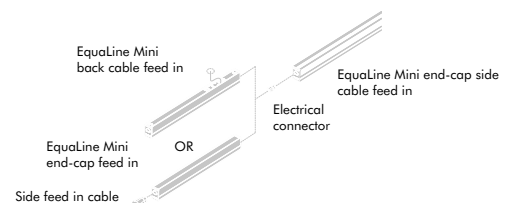

Specification

To specify state:
A slender LED batten with aluminium body and opal PC diffuser, lengths of 580mm and 1180mm. High efficacy up to 120Lm/W. Can be individually or continuously mounted. Provides lumen packages of 1050, 2100 and 4200lm. Electrical mains connection between luminaires through connector system integrated in end-caps.
As Thorn Equaline Mini.

Art Nr: 96644088



5 Year Warranty

As a globally leading luminaire manufacturer, Thorn Lighting provides a five-year warranty for its complete product range within all European Countries. www.thornlighting.com/warranty

www.thornlighting.com/EQUM

THORN
LIGHTING PEOPLE