Alumet Control Indirect

96255192 <ALUMET CONTROL/I 90W CPO CL1 CL

ISO 9223 C3 | IP65 | IK10

Alumet Control Indirect

Head of the architectural lighting column Alumet Control Indirect for 1 x 90W Light Source: 1 x HIT-CE / 90W lamp with an UV resistant polycarbonate diffuser with anti scratch and graffiti varnish, top cap, base and optic cover made of aluminium, reflector and optical discs made of anodised aluminium. Supplied in one box with the IP65 gear (suspended in the top of the column) and 4m cable. Class I electrical, 220/240V, IK10, IP65. To be mounted on an Alumet column. Lamps to be ordered separately.

Height: 1250mm
Luminaire input power: 99 W
Weight: 13.5 kg
Windage: 0.079m²

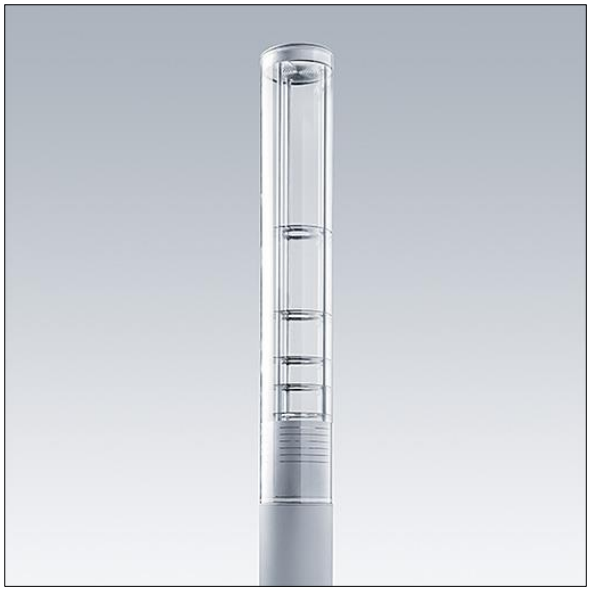

TLG_ALUM_F_2IND_LGY.jpg

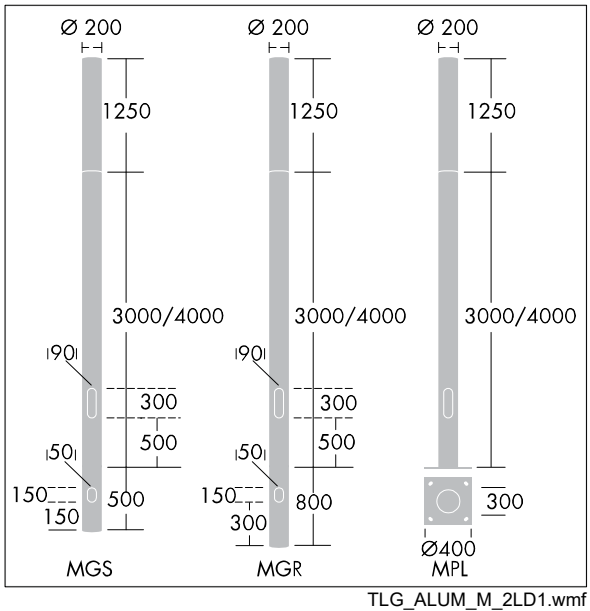

TLG_ALUM_M_2LD1.wmf

All values marked with an * are rated values. Unless stated otherwise, the values apply to an ambient temperature of 25°C.

Thorn Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement.
© Thorn Lighting