Quattro T5

96549482 <QUATROT5 3x14W T16 HFIX FEFL E3

$T_{p(a)}$			CE		EAC	850°C	T_a25	

Quattro T5

Recessed modular luminaire, with emergency lighting function, for 3 x 14W Light Source: 3 x T16 / 14W lamps. With Electronic, circuit DALI dimmable control gear and with 3 hour, manual test, emergency lighting circuit emergency operation. White painted steel body with clear prismatic polyethylene terephthalate glycol diffuser panel in fabricated white pvc frame (UK Building Regs Part B2 class TP[a] - 850°C). Lays into most exposed grid ceiling systems and can be installed into concealed fix ceilings using "wedge" suspension brackets (supplied). Complete with 840 lamp.

Dimensions 597 x 597 x 59mm

Luminaire input power: 46.5 W

Weight: 5.4 kg

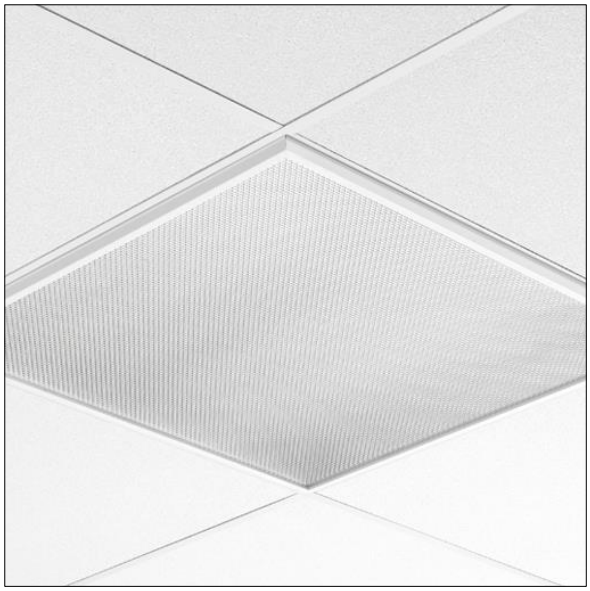

TLG_QUAT_F_T54X14WFEFL.jpg

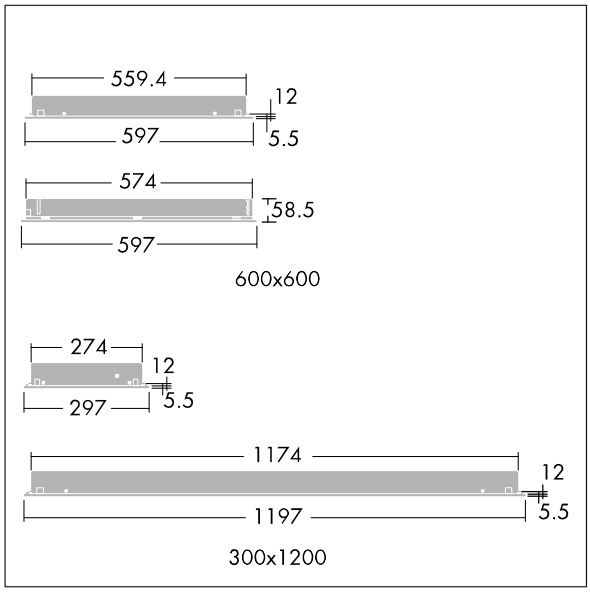

TLG_QTR5_M_LD1.wmf

All values marked with an * are rated values. Unless stated otherwise, the values apply to an ambient temperature of 25°C.

Thorn Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement.
© Thorn Lighting