96261644 <ISARO 70W/BPL HST 230V CL2 PC MA76

IP66 | IK10

A road and street lantern, designed for durability, for 1 x 70W Light Source: 1 x HST-MF / 70W lamp. Magnetic, bi-power control gear. Class II electrical, IP66, IK10. Body: die-cast aluminium, powder coated grey (RAL9006). Bracket: die-cast aluminium, unpainted. Enclosure: shallow polycarbonate. Suitable for post top mounting on Ø76mm spigot. Variable tilting in 5° steps, post top: 0° to +10°, lateral: -20° to 0°. Cable gland for Ø8 to 12mm cable. Safe access (automatic disconnection) from above to the gear tray and optical system after quick release of the stainless steel front clip. Delivered, ready to install, in a single carton. Lamp to be ordered separately.

Luminaire input power: 84 W
Dimensions: 602 x 282 x 195 mm
Weight: 6.15 kg
Scx: 0.069 m²

TLG_ISRO_F_HIDMTPESHPRO.jpg

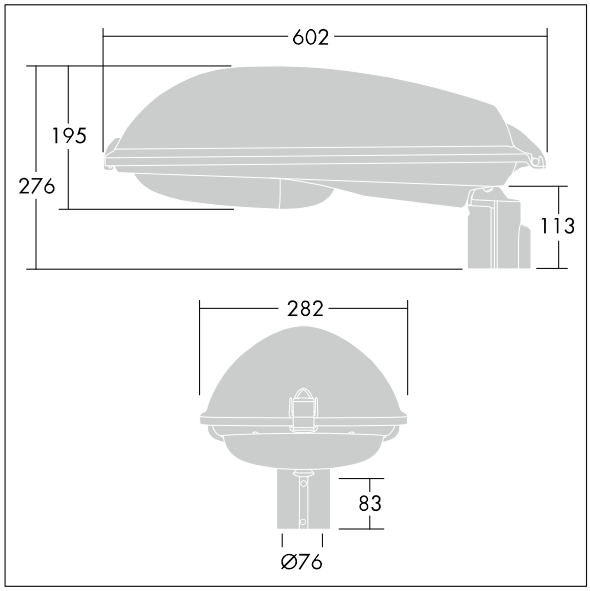

TLG_ISRO_M_HID.wmf

All values marked with an * are rated values. Unless stated otherwise, the values apply to an ambient temperature of 25°C.

Thorn Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement.
© Thorn Lighting

THORN

96261644 <ISARO 70W/BPL HST 230V CL2 PC MA76

Thorn Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement.
© Thorn Lighting