Dyana

96264368 <DYANA2 LED 72L50 NR 740 DALI CL2 MTP 10

IP66 IK09

Dyana

A high quality LED luminaire with narrow road light distribution and Electronic, Programmable control gear. Body and spigot: die-cast aluminium, textured dark grey finish. Canopy: spun aluminium, textured anthracite finish. Enclosure: 5mm thick, toughened glass. Class II electrical, IP66. Pre-wired with 10m CSR LSZH cable. Supplied, ready to install, in a single box. Complete with 4000K LED

Mounting: Ø60mm post-top with 10° tilt.

Dimensions: 725 x 600 x 287 mm
Luminaire input power: 109 W
Weight: 15.2 kg
Scx: 0.059 m²

TLG_DYNA_F_2MLEDMTP_1_14.jpg

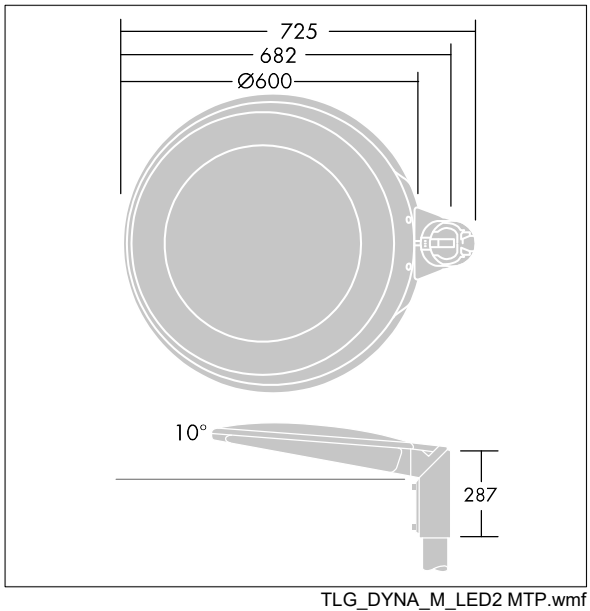

TLG_DYNA_M_LED2 MTP.wmf

This product contains a light source of energy efficiency class D.

All values marked with an * are rated values. Thorn uses tried and tested components from leading suppliers, however there may be isolated instances of technology-related failures of individual LEDs during the rated product lifetime. International standards set the tolerance in initial flux and connected load at ±10%. Unless stated otherwise, the values apply to an ambient temperature of 25°C.

Thorn Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement.
© Thorn Lighting

Dyana

96264368 <DYANA2 LED 72L50 NR 740 DALI CL2 MTP 10

Thorn Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement.
© Thorn Lighting