THORN

96242096 <CETUS LED 1000 HF 840

IP20 IP44 IK09 850°C

A value performance, low height, ceiling recessed LED downlight. Electronic, fixed output control gear. Body and reflector: aluminium, powder coated white (RAL 9016). Diffuser: polycarbonate. Class II electrical, IP44, IK09. Spring clips suitable for ceiling thicknesses from 1 to 35mm. Cut-out Ø190mm. Complete with 4000K LED.

Dimensions: Ø215 x 88 mm
Luminaire input power: 9.5 W
Weight: 0.7 kg

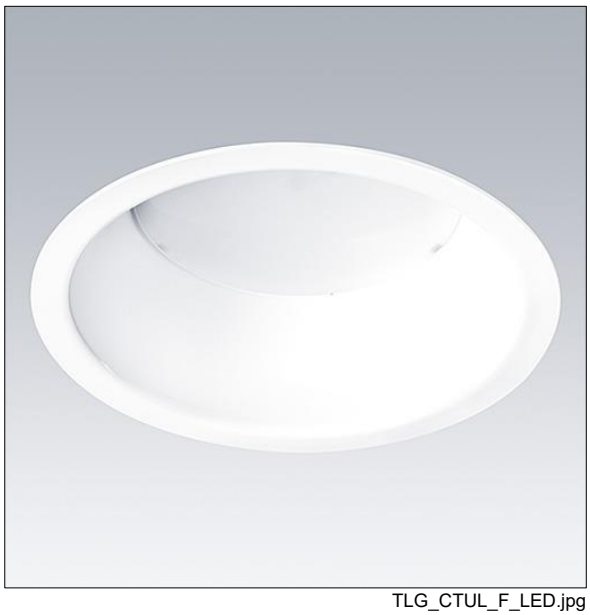

TLG_CTUL_F_LED.jpg

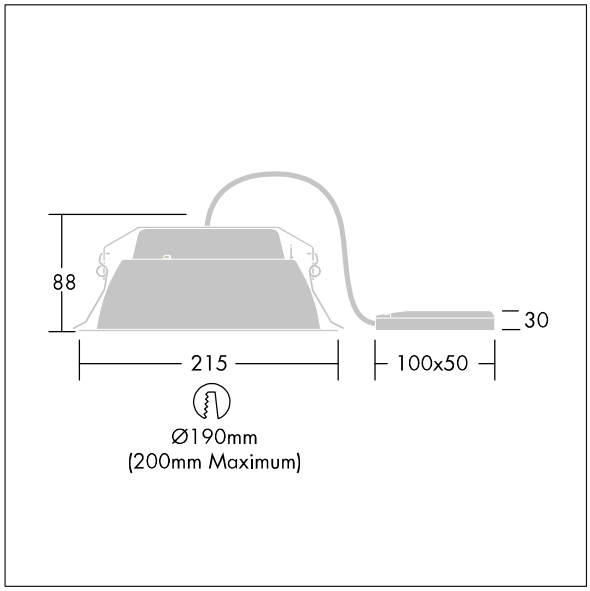

TLG_CETU_M_1000LM.wmf

This product contains a light source of energy efficiency class D.

All values marked with an * are rated values. Thorn uses tried and tested components from leading suppliers, however there may be isolated instances of technology-related failures of individual LEDs during the rated product lifetime. International standards set the tolerance in initial flux and connected load at ±10%. Unless stated otherwise, the values apply to an ambient temperature of 25°C.

Thorn Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement.
© Thorn Lighting

96242096 <CETUS LED 1000 HF 840

Thorn Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement.
© Thorn Lighting