# 96221653 <JOHANNA LED 18L35-730 CL2 4,5M MTP60

| ISO 9223 C5 | IP66 | IK09 | | | | | 650°C |
|---|---|---|---|---|---|---|---|

A decorative LED lantern with a classic design and symmetrical distribution giving highly comfortable light for amenity applications. Electronic, bi-power control gear driving 18 LEDs at 350mA. Equipped with 50% power reduction circuit, effective 3 hours before and 5 hours after a calculated midnight. It can be deactivated at installation with an easily accessible internal switch. Class II electrical, IP66, IK09. Base and top cover: aluminium. Canopy: ABS plastic. Diffuser: opal Tarflon®. Canopy and base powder coated pearl light grey (RAL9022). To be post-top mounted on a Ø60mm column, secured by 5mm Allen screw. Pre-wired with 4,5m H05-RNF cable. Complete with 3000K LED.

Dimensions: 705 x 705 x 514 mm
Luminaire input power: 22 W
Weight: 7.7 kg
Scx: 0.12 m²

TLG_JHNL_F_LEDPDBLIT.jpg

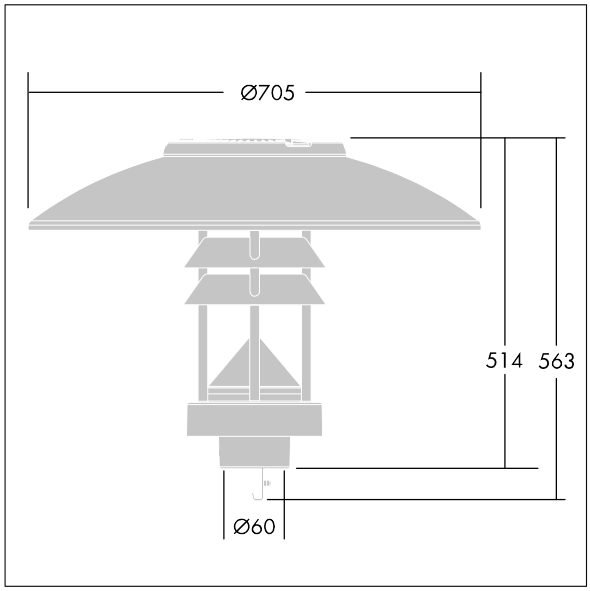


TLG_JHNA_M_LEDLD1.wmf

This product contains a light source of energy efficiency class D.

All values marked with an * are rated values. Thorn uses tried and tested components from leading suppliers, however there may be isolated instances of technology-related failures of individual LEDs during the rated product lifetime. International standards set the tolerance in initial flux and connected load at ±10%. Unless stated otherwise, the values apply to an ambient temperature of 25°C.

Thorn Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement.
© Thorn Lighting

THORN

# 96221653 <JOHANNA LED 18L35-730 CL2 4,5M MTP60

Thorn Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement.
© Thorn Lighting