Jalon

96271420 JALON LED 12L18 840 MWA V

IP65 | IK05

Jalon

A Recessed LED luminaire for guidance, in vertical orientation. 12 LEDs, driven at a fixed 180mA by integral driver. Body: die-cast aluminium, painted dark grey. Enclosure: polycarbonate. Supplied with polyethylene recessed box (96271424, 128 x76 x 61 mm), also available separately. Electrical connection via 2 pole terminal block. Class II electrical, IP65, IK05. Complete with 4000K LED.

Dimensions: 71 x 108 x 51 mm
Luminaire input power: 4 W
Luminaire luminous flux: 96 lm
Luminaire efficacy: 24 lm/W
Weight: 0.3 kg

TLG_JALL_F_MWAVPDB.jpg

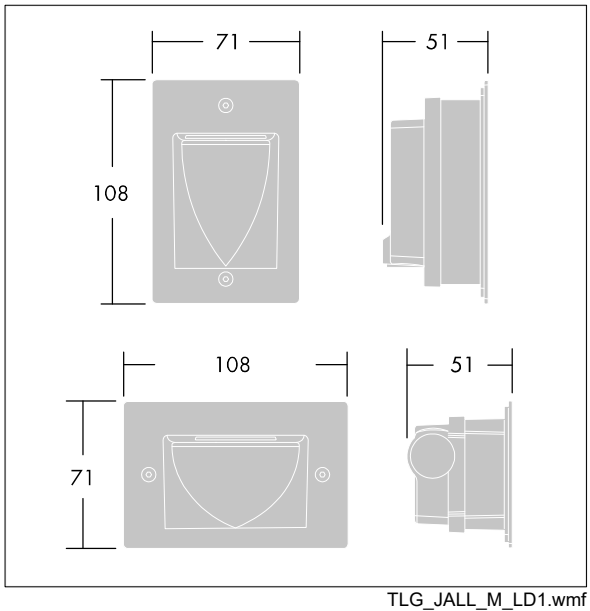

TLG_JALL_M_LD1.wmf

This product contains a light source of energy efficiency class F.

All values marked with an * are rated values. Thorn uses tried and tested components from leading suppliers, however there may be isolated instances of technology-related failures of individual LEDs during the rated product lifetime. International standards set the tolerance in initial flux and connected load at ±10%. Unless stated otherwise, the values apply to an ambient temperature of 25°C.

Thorn Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement.
© Thorn Lighting

Jalon

96271420 JALON LED 12L18 840 MWA V

Thorn Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement.
© Thorn Lighting