96627515 <PRIM L3 LED11000-840 A/A HF SET

IP20 | halogen | IK02

3000 mm length of trunking, for direct ceiling fixing or suspended mounting on wire or chains, with 11 000 lm LED luminaire with disymmetric distribution. LED converter. Roll-formed sheet steel in Polyester lacquered finish. Class I electrical, IP20. Standard module, with mechanical connector. Supplied with plug-in, 7-pole through wiring. Complete with side panels. Complete with 4000K LED.

Dimensions: 3000 x 68 x 93 mm
Luminaire input power: 80 W
Luminaire luminous flux: 10900 lm
Luminaire efficacy: 136 lm/W
Weight: 8.3 kg

TLG_PMM5_F_LEDPDB.jpg

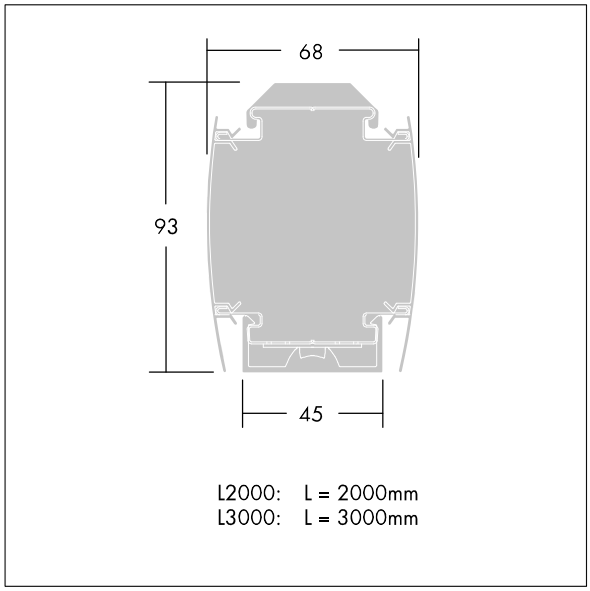

TLG_PMML_M_LED_bestueckt.wmf

This product contains a light source of energy efficiency class D.

All values marked with an * are rated values. Thorn uses tried and tested components from leading suppliers, however there may be isolated instances of technology-related failures of individual LEDs during the rated product lifetime. International standards set the tolerance in initial flux and connected load at ±10%. Unless stated otherwise, the values apply to an ambient temperature of 25°C.

Thorn Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement.
© Thorn Lighting

THORN

96627515 <PRIM L3 LED11000-840 A/A HF SET

Thorn Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement.
© Thorn Lighting