Mica

96271551 MICA SLIM I 9L90 ACC 28D 832 AL SF

IP67 | IK10

Mica

A large, shallow, round ground recessed luminaire. 9 LED (s) driven at 900mA by integral driver. 28° beam angle for driveover illumination applications. Tilting angle adjustment of ±15°. Body: die-cast aluminium with powdered paint finish. Frame: painted aluminium, 3mm thick. Front glass: semi-frosted toughened glass, mm thick, surface temperature complies with EN60598-2-13. Pre-wired with 0.5m cable. Recessing box: polypropylene. Rated IP67, class I electrical. Maximum static load 3500kg. Complete with 3200K LED

Mica and Mica Slim can be installed in areas with a maximum low speed of 30km/h for the flat versions and 20km/h for the dome versions.

Dimensions: Ø300 x 200 mm
Luminaire input power: 27.3 W
Luminaire luminous flux: 1523 lm
Luminaire efficacy: 56 lm/W
Weight: 8.49 kg

TLG_MICA_F_SI9LEDALSF.jpg

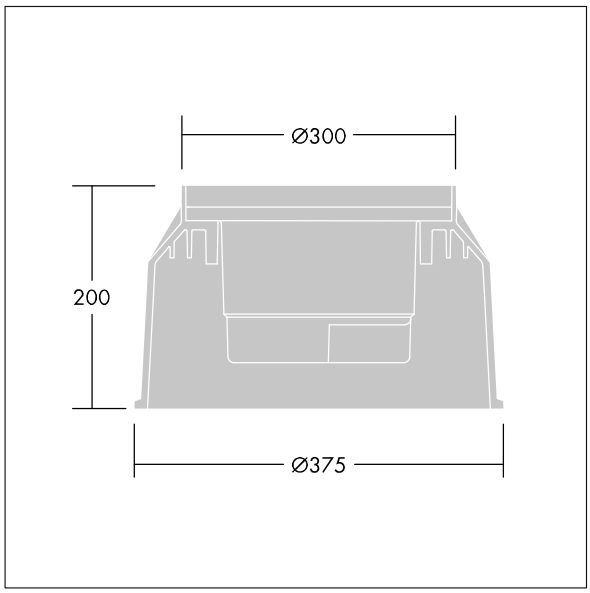

TLG_MICA_M_2015LDSLMIAL.wmf

This product contains a light source of energy efficiency class E.

All values marked with an * are rated values. Thorn uses tried and tested components from leading suppliers, however there may be isolated instances of technology-related failures of individual LEDs during the rated product lifetime. International standards set the tolerance in initial flux and connected load at ±10%. Unless stated otherwise, the values apply to an ambient temperature of 25°C.

Thorn Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement.
© Thorn Lighting