Areaflood Pro

96644974 <AFP M 72L50-740 EWR CLO BS 3550 CL1 GY

ISO 9223 C5 | IP66 | IK08 | Ta -25 +35

Areaflood Pro

A compact, lightweight, general purpose LED area floodlight. With medium body. LED converter configured for power reduction, effective 3 hours before and 5 hours after a calculated midnight, driving 72 LEDs at 500mA with Extra Wide Road light distribution. IP66, IK08, Class I electrical. Body: die-cast aluminium, Light grey 150 sanded textured (close to RAL9006).. Enclosure: mm thick toughened glass. Reversable mounting stirrup supplied, Driver programmed for constant light output. Complete with 4000K LED.

TLG_AFLP_F_MEDIUMPDB.jpg

Not compatible with UrbaSens systems.

Dimensions: 458 x 490 x 139 mm
Luminaire input power: 107 W
Luminaire luminous flux: 17366 lm
Luminaire efficacy: 162 lm/W
weight: 13.81 kg
Scx: 0.064 m²

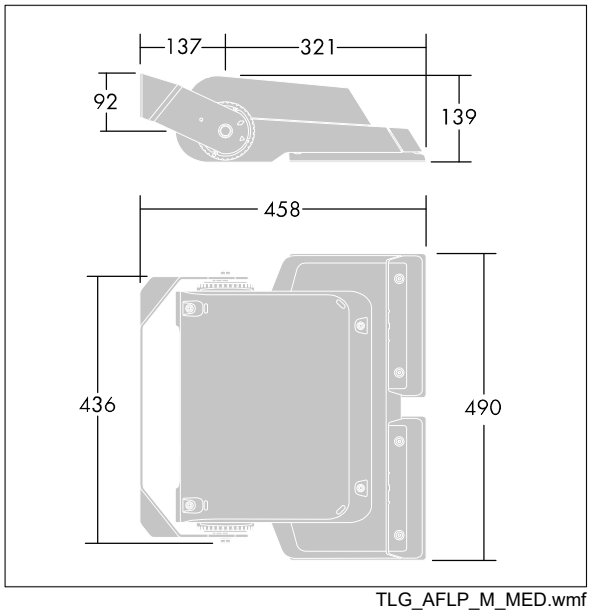

TLG_AFLP_M_MED.wmf

This product contains light sources of energy efficiency class E.

All values marked with an * are rated values. Thorn uses tried and tested components from leading suppliers, however there may be isolated instances of technology-related failures of individual LEDs during the rated product lifetime. International standards set the tolerance in initial flux and connected load at ±10%. Unless stated otherwise, the values apply to an ambient temperature of 25°C.

Thorn Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement.
© Thorn Lighting

Areaflood Pro

96644974 <AFP M 72L50-740 EWR CLO BS 3550 CL1 GY

Thorn Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement.
© Thorn Lighting