Chalice Pro HO

96666164 <CHAL PRO LED7500-840 HF MB W6 MSF

IP65 | T_a - 20 +35

Chalice Pro HO

A high output surface mounted downlight with fixed output control gear. Class I electrical, IP65. Body: aluminium, painted white (RAL 9016). Reflector: high grade anodised aluminium. Clips: stainless steel. Bezel: aluminium. 3 key hole fixing points in the installation plate directly to the ceiling. Body retained by a bayonet twist and lock function. Electrical connection via 3 x 2 x 2.5mm² push wire terminal block suitable for loop in / loop out wiring. Complete with 4000K LED.

Dimensions: Ø220 x 210 mm
Luminaire input power: 71 W
Luminaire luminous flux: 7500 lm
Luminaire efficacy: 106 lm/W
Weight: 3.8 kg

TLG_CHPH_F_surface_wh.jpg

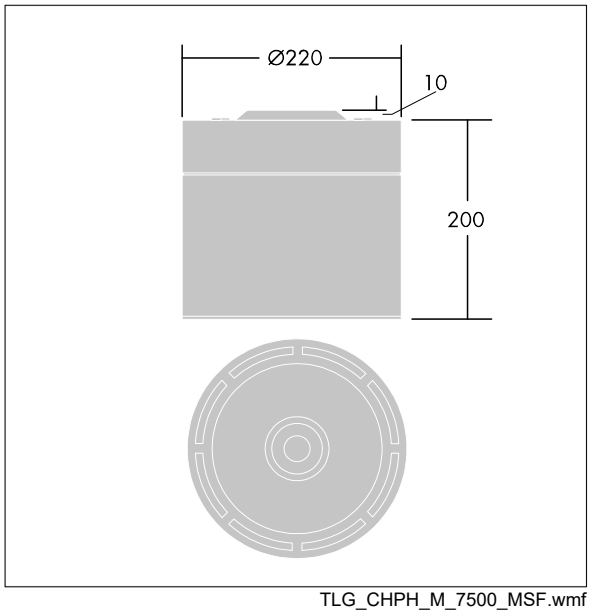

TLG_CHPH_M_7500_MSF.wmf

All values marked with an * are rated values. Thorn uses tried and tested components from leading suppliers, however there may be isolated instances of technology-related failures of individual LEDs during the rated product lifetime. International standards set the tolerance in initial flux and connected load at ±10%. Unless stated otherwise, the values apply to an ambient temperature of 25°C.

Thorn Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement.
© Thorn Lighting

Chalice Pro HO

96666164 <CHAL PRO LED7500-840 HF MB W6 MSF

Thorn Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement.
© Thorn Lighting