Flow

92901856 <FW 24L50 740 NR BS 3550 HFX CL1 WS6 ->

CB Certificate	ISO 9223 C5	11	IP66	IK10		CE					T_a -30 +25

Flow

A highly versatile LED lantern with a Narrow Road, asymmetric distribution. Electronic, DALI dimmable control gear driving 24 LEDs at 500mA. Compatible with PL, LRT, 7 pin Nema socket. Class I electrical, IP66, IK10. Housing, canopy and spigot: die-cast aluminium (EN AC-47100) powder coated anthracite (close to RAL7043).. Enclosure: 6mm thick clear glass. Equipped with 50% power reduction circuit, effective 3 hours before and 5 hours after a calculated midnight. It can be deactivated at installation with an easily accessible internal switch.. Complete with 4000K LED. Post top Amenity D60 0° Pre-wired with 6m cable.

TLG_FLOW_F_PDB_FR.jpg

Dimensions: 435 x 436 x 578 mm
Luminaire input power: 38 W
Luminaire luminous flux: 5068 lm
Luminaire efficacy: 133 lm/W
Weight: 12.5 kg
Scx: 0.083 m²

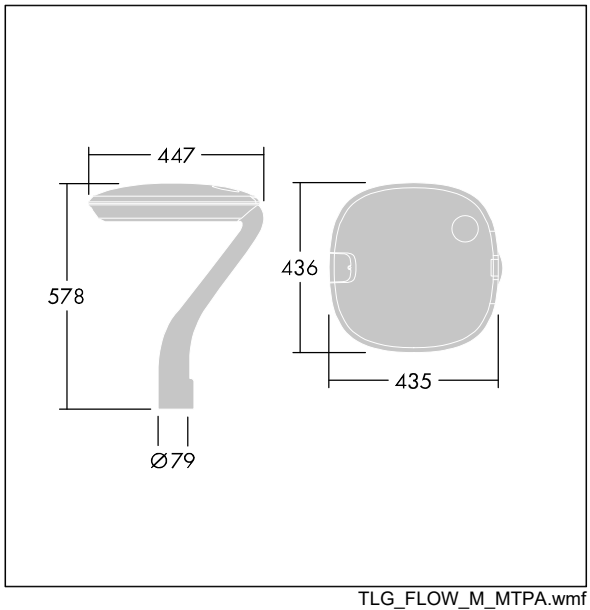

TLG_FLOW_M_MTPA.wmf

This product contains light sources of energy efficiency class D.

All values marked with an * are rated values. Thorn uses tried and tested components from leading suppliers, however there may be isolated instances of technology-related failures of individual LEDs during the rated product lifetime. International standards set the tolerance in initial flux and connected load at ±10%. Unless stated otherwise, the values apply to an ambient temperature of 25°C.

Thorn Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement.
© Thorn Lighting