Flow

96631847 <FW 24L50 740 NR BS 3550 HFX CL1 T60F ->

ISO 9223 C5 | IP66 | IK10 | T_a -30 +25

Flow

A highly versatile LED lantern with a Narrow Road, asymmetric distribution. Electronic, DALI dimmable control gear driving 24 LEDs at 500mA. Compatible with PL, LRT, 7 pin Nema socket. Class I electrical, IP66, IK10. Housing, canopy and spigot: die-cast aluminium (EN AC-47100) powder coated anthracite (close to RAL7043).. Enclosure: 6mm thick clear glass. Equipped with power reduction circuit, effective 3 hours before and 5 hours after a calculated midnight. It can be deactivated at installation with an easily accessible internal switch. DALI controllable with additional signal cables.. Complete with 4000K LED. Post top mounting to Ø60mm column, tilt 5°, adjustable from 0° to +10°.

TLG_FLOW_F_MTP_CL.jpg

Dimensions: 435 x 436 x 200 mm
Luminaire input power: 38 W
Luminaire luminous flux: 5537 lm
Luminaire efficacy: 146 lm/W
Weight: 9.6 kg
Scx: 0.054 m²

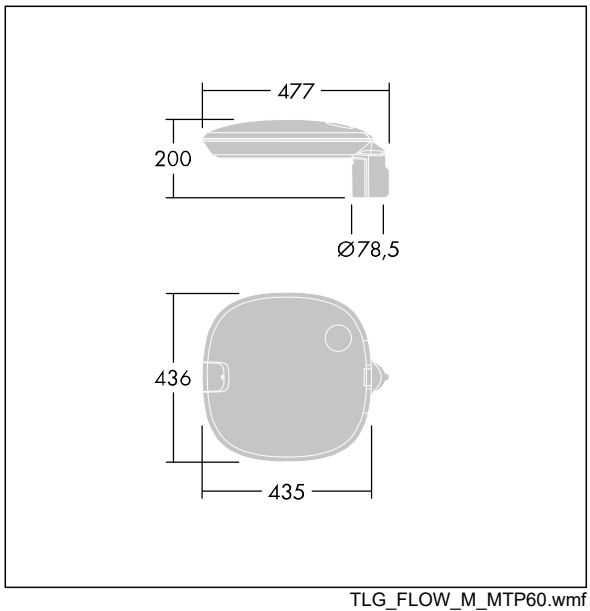

TLG_FLOW_M_MTP60.wmf

This product contains light sources of energy efficiency class D.

All values marked with an * are rated values. Thorn uses tried and tested components from leading suppliers, however there may be isolated instances of technology-related failures of individual LEDs during the rated product lifetime. International standards set the tolerance in initial flux and connected load at ±10%. Unless stated otherwise, the values apply to an ambient temperature of 25°C.

Thorn Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement.
© Thorn Lighting

Flow

96631847 <FW 24L50 740 NR BS 3550 HFX CL1 T60F ->

Thorn Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement.
© Thorn Lighting