96632354 AXYL S L220 28L50 1WD 930

IP65 | IK06 | T_a -25 +40

A Wall mounted, architectural LED luminaire for decorative facade lighting, with 1 window distribution. 28 LEDS driven at 500mA. Fixed output LED driver. Class I electrical, IP65, IK06. Housing: die-cast aluminium (EN AC-44300), powder coated textured anthracite (close to RAL7043). Working ambient temperature: -25°C to +40°C. Complete with 3000K LED.

Dimensions: 80 x 220 x 33 mm
Luminaire input power: 13 W
Luminaire luminous flux: 555 lm
Luminaire efficacy: 43 lm/W
Weight: 0.8 kg

TLG_AXYL_F_L220_ANT.jpg

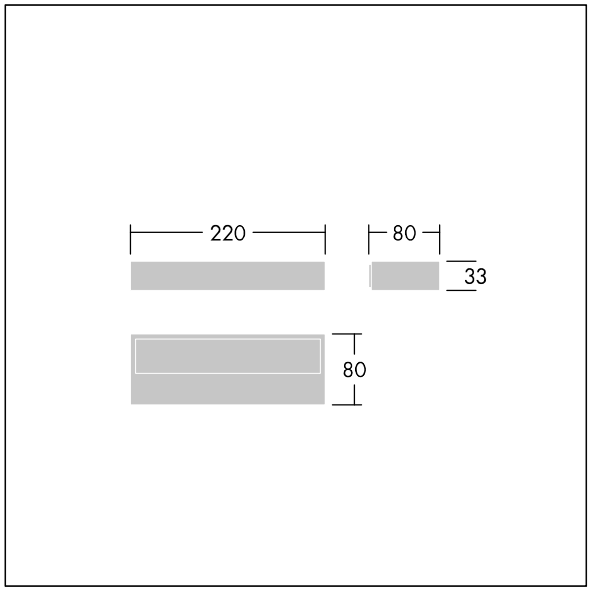

TLG_AXYL_M_220.wmf

This product contains a light source of energy efficiency class E.

All values marked with an * are rated values. Thorn uses tried and tested components from leading suppliers, however there may be isolated instances of technology-related failures of individual LEDs during the rated product lifetime. International standards set the tolerance in initial flux and connected load at ±10%. Unless stated otherwise, the values apply to an ambient temperature of 25°C.

Thorn Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement.
© Thorn Lighting

THORN

96632354 AXYL S L220 28L50 1WD 930

Thorn Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement.
© Thorn Lighting