# Omega Pro 2

## 92915530 OP2 4400-927-65 CKIT+ HX Q625

| | | | | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|
| CB Certificate | IEC EN 60598-1 RG 0 | | | IP20 IP40 | IK03 | | CE | | | 650 °C | Ta 0 +35 | |

## Omega Pro 2

A recessed/surface/suspended, edge-lit LED luminaire. LED driver, DALI-2 dimmable. Class II electrical, IP40_IP20, Impact strength: IK03. Body: sheet steel, finished white (close to RAL9016). Diffuser: UV-stabilised polycarbonate hexagonal comfort optic with central control pod hole. Electrical connection via 7 pole piano key terminals, loop-in/loop-out possible. Complete with VCT technology (variable colour temperature), stepless tunable from 2700-6500K, DT8., Colour Rendering Index min.: 90

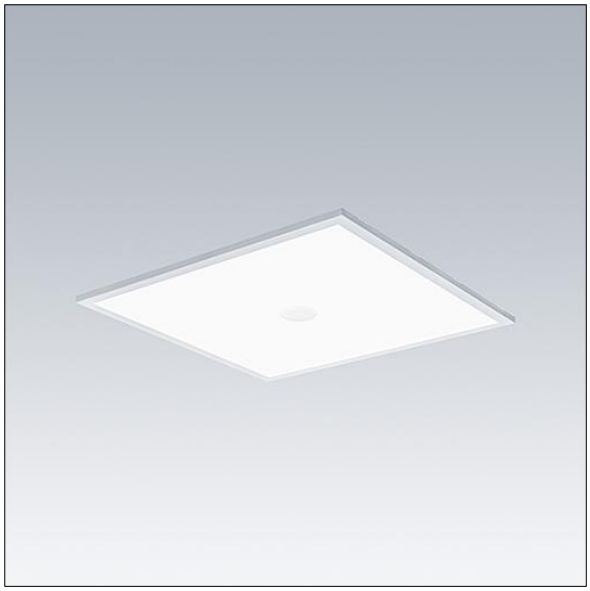

TLG_OMP2_F_QMPTKIT_PDB.jpg

Dimensions: 622 x 622 x 57 mm
Luminaire input power: 48.2 W
Luminaire luminous flux: 4450 lm
Luminaire efficacy: 92 lm/W
Weight: 5.75 kg

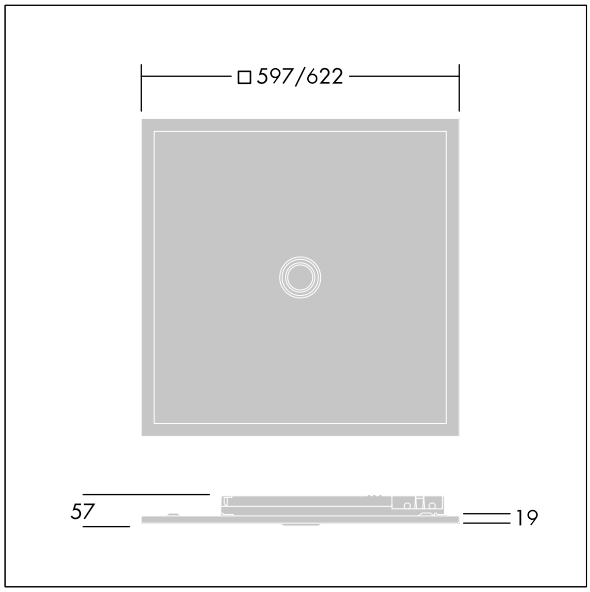


TLG_OMP2_M_QKIT.wmf

This product contains a light source of energy efficiency class D.

All values marked with an * are rated values. Thorn uses tried and tested components from leading suppliers, however there may be isolated instances of technology-related failures of individual LEDs during the rated product lifetime. International standards set the tolerance in initial flux and connected load at ±10%. Unless stated otherwise, the values apply to an ambient temperature of 25°C.

Thorn Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement.
© Thorn Lighting

# Omega Pro 2

## 92915530 OP2 4400-927-65 CKIT+ HX Q625

Thorn Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement.
© Thorn Lighting