Contrast

96633670 CONT3 36L105-830 NB HFX SP BK
+ 96633467 CONT3 36/52L DIFFUSER UWB 55x55° BK

ISO 9223 C5 | IP66 | IK08 | Ta - 20 +35

Contrast

A large architectural Bracket mounted LED floodlight with 36 LEDs driven at 1050mA and a narrow beam distribution. LED driver, DALI-2 dimmable. Class II electrical, IP66, IK08. Body: die-cast, powder coated, textured black (close to RAL9005). Compatible with coastal environments. Glass: tempered, 5mm thick. Gasket: EPDM. Screws: geomet. Equipped with 10kV / 10kA surge protection device. Complete with 3000K LED

,

Dimensions: Ø397 x 206 mm
Luminaire input power: 117 W
Luminaire luminous flux: 11814 lm
Luminaire efficacy: 101 lm/W
Weight: 13.2 kg

Equipped with:
Rotative beam diffuser to change the beam aperture. To be mounted directly on the front of a large Contrast luminaire. Can be combined with a visor. Best resistance against corrosion. Compatible with seaside installation.

Not compatible with 52L105 fittings due to thermal management

TLG_CON3_F_M_52L_FILMDIFF.jpg

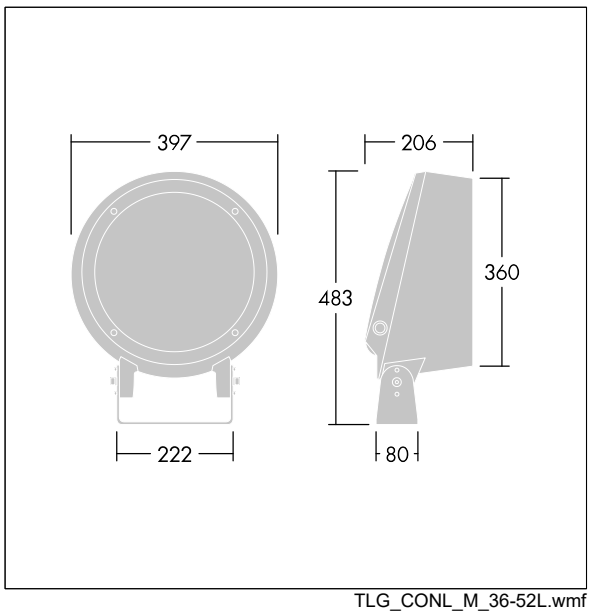

TLG_CONL_M_36-52L.wmf

All values marked with an * are rated values. Thorn uses tried and tested components from leading suppliers, however there may be isolated instances of technology-related failures of individual LEDs during the rated product lifetime. International standards set the tolerance in initial flux and connected load at ±10%. Unless stated otherwise, the values apply to an ambient temperature of 25°C.

Thorn Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement.
© Thorn Lighting

Contrast

96633670 CONT3 36L105-830 NB HFX SP BK

+ 96633467 CONT3 36/52L DIFFUSER UWB 55x55° BK

Thorn Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement.
© Thorn Lighting