Discontinued

96209539 <OPTUS IV D 2x35W HFI GRY DSB E3TX L840

IP20

Discontinued

A surface mounted and suspended luminaire with a modern slim design, suitable for both office and school applications. For 2x35W Light Source: 2 x T16 / 35W lamp(s). Electronic, DALI / DSI digital dimmable control gear with 3 hour, Self/DALI Addressable test, emergency lighting circuit. Body: extruded aluminium with powder coated aluminium, matt grey finish. End Caps: die-cast zinc, and satinbrite louvre in anodised aluminium. Class I electrical, IP20. Electrical connection via factory fitted 8 x 2 x 2.5 mm² piano key terminal block and cable clamp. Key hole fixing centres 1300mm. Complete with 840 lamp(s).

Dimensions: 1509 x 165 x 61 mm
Luminaire input power: 74.5 W
Weight: 3.2 kg

TLG_OPT4_F_2SURGRYSB.jpg

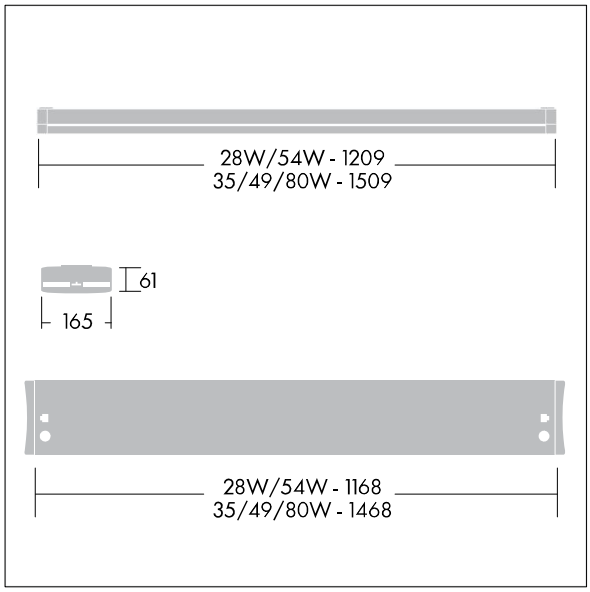

TLG_OPT4_M_SLD1a.wmf

All values marked with an * are rated values. Unless stated otherwise, the values apply to an ambient temperature of 25°C.

Thorn Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement.
© Thorn Lighting

Discontinued

96209539 <OPTUS IV D 2x35W HFI GRY DSB E3TX L840

Thorn Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement.
© Thorn Lighting