Discontinued

96210314 <PLANOR LED 2600 HFIX L840

IP20 | IK06 | 750°C | Ta 0 +25

Discontinued

Slim and elegant suspended edgelit LED luminaire with 2680lm LED light engine and Electronic, DALI dimmable control gear. Class I electrical, IP20. Frame: extruded aluminium, powder coated silver-grey. Brackets: aluminium, anodised in natural colour. Light guide optic: acrylic. Top cover: clear polycarbonate. Fitted with 3m halogen free grey cable. 2m Quicklock suspension kit included. Complete with 4000K LED.

Dimensions: 1200 x 255 x 35 mm
Luminaire input power: 32 W
Weight: 6 kg

TLG_PLNR_F_LEDSUSPPDBLIT.jpg

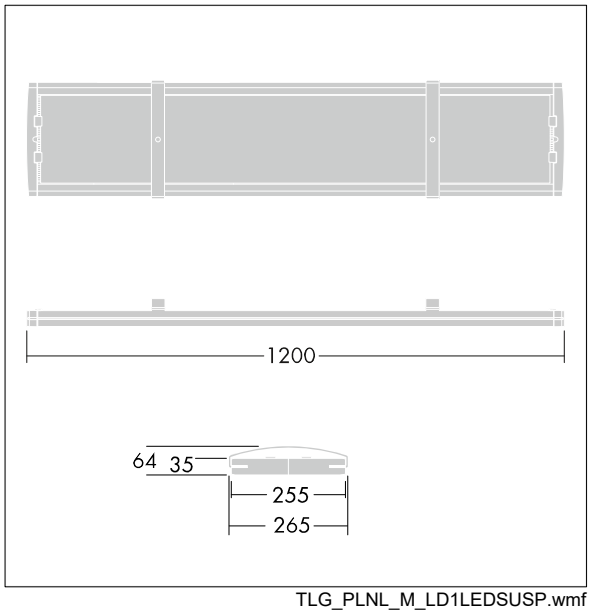

TLG_PLNL_M_LD1LEDSUSP.wmf

All values marked with an * are rated values. Thorn uses tried and tested components from leading suppliers, however there may be isolated instances of technology-related failures of individual LEDs during the rated product lifetime. International standards set the tolerance in initial flux and connected load at ±10%. Unless stated otherwise, the values apply to an ambient temperature of 25°C.

Thorn Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement.
© Thorn Lighting