THORN

96644010 <NOVALINE LED3500-830 HF RF E3 CHR

IP40	IK02							850°C	Ta 0 +25	

A round bulkhead LED luminaire. Electronic, fixed output control gear with 3 hour, manual test, emergency lighting circuit. Body and bezel: Chrome finish, spun aluminium. Diffuser: opal polycarbonate. Class I electrical, IP40. With radio frequency module (Slave). Complete with 3000K LED.

Dimensions: Ø455 x 105 mm
Luminaire input power: 32.5 W
Luminaire luminous flux: 3200 lm
Luminaire efficacy: 98 lm/W
Weight: 2.58 kg

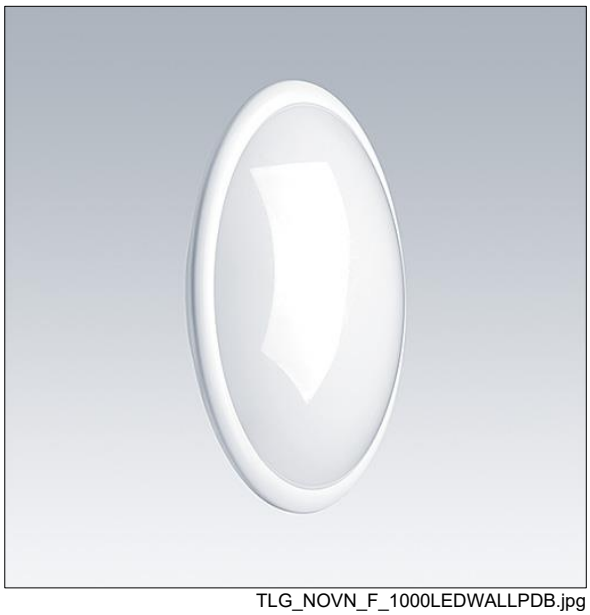

TLG_NOVN_F_1000LEDWALLPDB.jpg

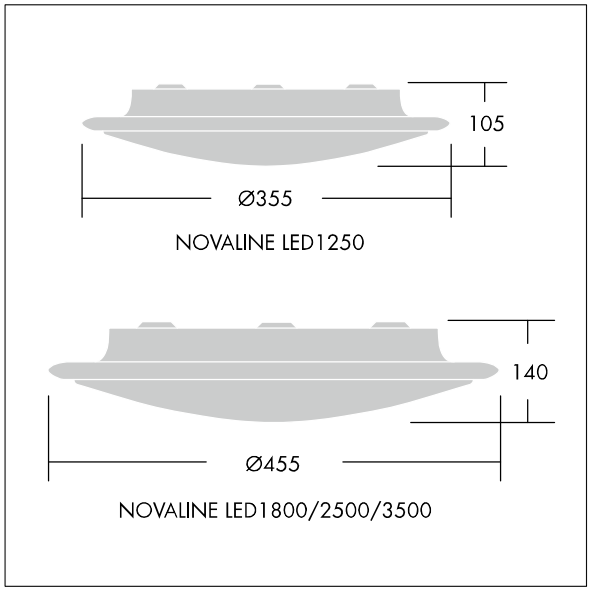

TLG_NOVN_M_LED2.wmf

This product contains a light source of energy efficiency class C.

All values marked with an * are rated values. Thorn uses tried and tested components from leading suppliers, however there may be isolated instances of technology-related failures of individual LEDs during the rated product lifetime. International standards set the tolerance in initial flux and connected load at ±10%. Unless stated otherwise, the values apply to an ambient temperature of 25°C.

Thorn Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement.
© Thorn Lighting

96644010 <NOVALINE LED3500-830 HF RF E3 CHR

Thorn Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement.
© Thorn Lighting