Beta

96628656 BETA 3400 HF Q622 LED830

IP 20 40 | IK 03 | ⧈ | CE | EAC | 650 °C | T_a25

Beta

A recessed LED luminaire with a slim 9mm profile. Electronic, fixed output control gear. Class II electrical. Body: aluminium, white (RAL 9016). UGR<22. Complete with 3000K LED

Dimensions: 622 x 622 x 9 mm
Luminaire input power: 34.4 W
Luminaire luminous flux: 3248 lm
Luminaire efficacy: 94 lm/W
Weight: 4.3 kg

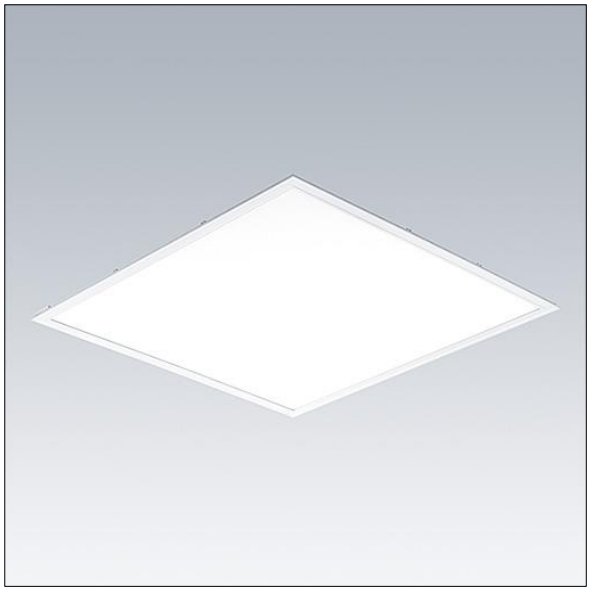

TLG_BETA_F_PDB.jpg

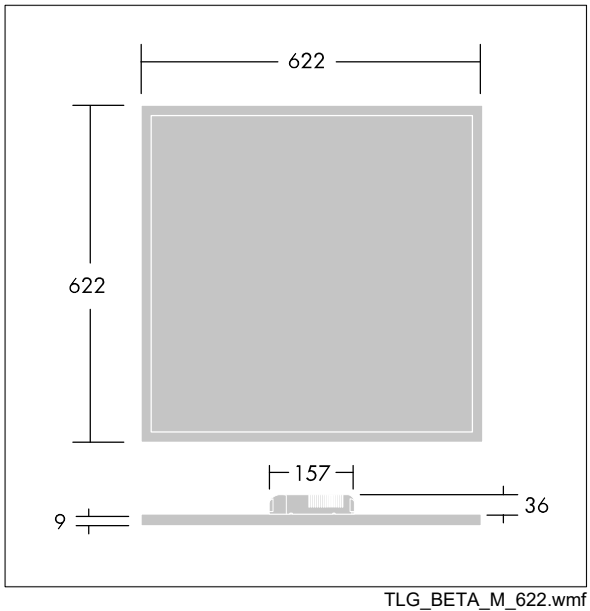

TLG_BETA_M_622.wmf

All values marked with an * are rated values. Thorn uses tried and tested components from leading suppliers, however there may be isolated instances of technology-related failures of individual LEDs during the rated product lifetime. International standards set the tolerance in initial flux and connected load at ±10%. Unless stated otherwise, the values apply to an ambient temperature of 25°C.

Thorn Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement.
© Thorn Lighting