THORN

96012208 <QBA 1 70W 240V HIT-DE A/S

IP66 | IK08 | 850°C

A compact discharge floodlight for architectural lighting, available in two sizes, with a choice in beam structures, and with a full range of accessories

A compact discharge floodlight for architectural lighting with IP66 optical and gear compartment, SC1 class. Grey powder coated die-cast aluminium
body with Flat Glass enclosure.
Projector is fully adjustable on a short stirrup, locked via central 8mm diameter allen screws.
asymmetrical floodlighting distribution with a aluminium - texturebrite reflector.
This product is suitable for a 70 W Light Source: 1 x HIT-DE-CE / 70W lamp.
Available in other colours as special (any RAL number, brick brown or pale sand).

Dimensions: 227 x 188 x 212 mm
Weight: 4.6 kg

TLG_QBAL_F_S1.jpg

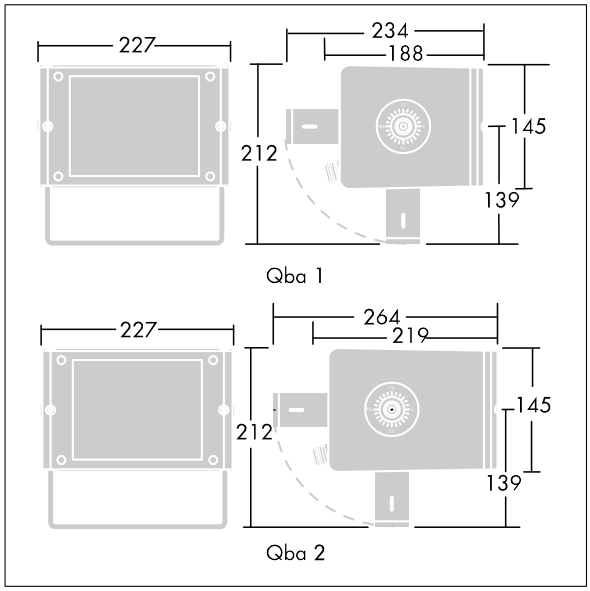

TLG_QBAL_M_LD1.wmf

All values marked with an * are rated values. Unless stated otherwise, the values apply to an ambient temperature of 25°C.

Thorn Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement.
© Thorn Lighting

THORN

96012208 <QBA 1 70W 240V HIT-DE A/S

Thorn Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement.
© Thorn Lighting