




D-CO Bollard

A timeless bollard offering comfortable visual guidance

- Comfortable white light with no glare provided by a semi-opal anti-UV PC diffuser
- Suitable for any application thanks to high specs and two heights
- 60,000 hour lifetime (L80, 25°) ensures low maintenance costs
- Flange mounting, compatible with root spikes



Photographs, line drawings and photometric data are representative only. For specific product detail please select an individual product.

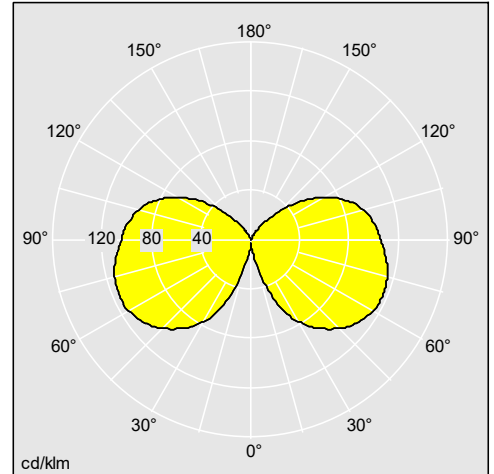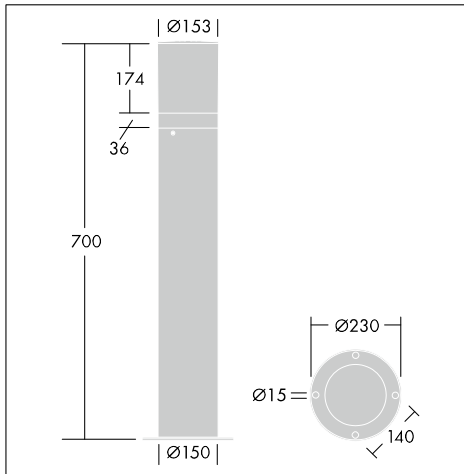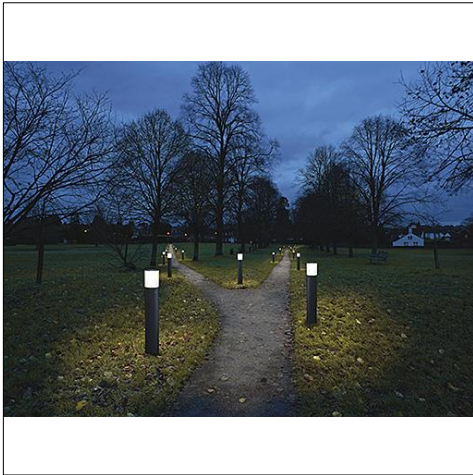

96262100

Material/Finish

Top and body: aluminium, powder coated grey 900
Diffuser: semi-opal anti-UV polycarbonate

Installation/Mounting

Suitable for flange mounting. Can fit a 450mm root spike to be fixed into concrete base. Can fit a 600mm root spike to be fixed into the ground.

Specification

To specify state:

Timeless design 14W LED bollard with semi-opal diffuser and symmetrical light distribution. Flange mounted.
As Thorn D-CO LED Bollard.

D-CO Bollard

Ordering Guide Supplied complete with LEDs

Description	ILCOS Code	Socket	Wt (kg)	SAP Code
D-CO LED Bollard				
D-CO LED BOLLARD 1000 30L50 830 CL2 CON	LED		5,45	96262098
D-CO LED BOLLARD 700 30L50 830 CL2 CON	LED		4,15	96262099
D-CO LED BOLLARD 1000 30L50 830 CL1	LED		5,45	96262100
D-CO LED BOLLARD 700 30L50 830 CL1	LED		4,15	96262101
D-CO LED BOLLARD 1000 30L50 840 CL2 CON	LED		5,45	96262143
D-CO LED BOLLARD 700 30L50 840 CL2 CON	LED		4,15	96262144
D-CO LED BOLLARD 1000 30L50 840 CL1	LED		5,45	96262145
D-CO LED BOLLARD 700 30L50 840 CL1	LED		4,15	96262146
D-CO LED BOLLARD 1000 30L50 830 CL2	LED		5,45	96262257
D-CO LED Bollard MGR base adaptors				
MGR SPIKE RAZE/DCO/THOR/CANDLE BOL			10	96635553
MGR BASE RAZE/DCO/THOR/CANDLE BOL			6	96635554