



Olsys Illumination

Discreet, durable and efficient LED floodlight for creating decorative lighting effects

- No accessories required for the decorative lighting effects
- $-90^{\circ}/+90^{\circ}$ tilt ensures you can place light exactly where you want it
- Exceptionally low cost of ownership with an optimised heat management system to provide a lifetime up to 80,000 hours (L70, 25°)
- Extremely durable full die-cast aluminium and IP66/IK08 rated package, complete with 10Kv surge protection



Photographs, line drawings and photometric data are representative only. For specific product detail please select an individual product.

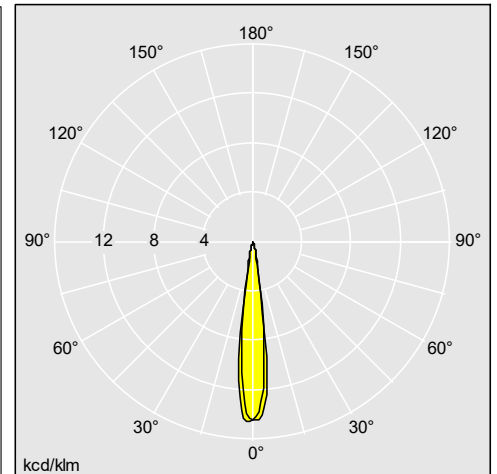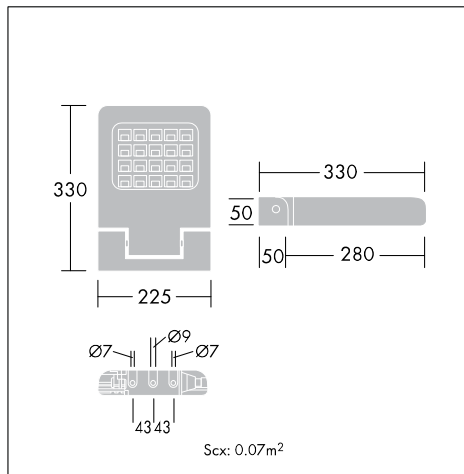

96274084

Material/Finish

Body: die-cast aluminium (AS9U) powder coated silver grey 9006
 Enclosure: size 1 clear UV stabilised PC
 Optics: polycarbonate
 Screws: stainless steel

Installation/Mounting

Delivered ready to install for wall mounting, knock out on the side of the base for cabling when it is not integrated within the wall. For ground and bracket installations, please order separately the spike. Possibility to post top mount with Olsys street accessories. Delivered with factory fitted integral gear, all supplied in one box. Maintenance: access to gear (replaceable) via 4 screws from the canopy.

Specification

To specify state:

IP66 24/45W (up to 3540Llm) LED floodlight with intensive distribution for wall or ground mounting.
 As Thorn Olsys illumination.