



Vioo

Unobtrusive LED floodlight for outdoor/indoor window surround illumination

- Precise ellipsoidal light beam for focused illumination
- Discreet with no visible screws thanks to a clip locking mechanism
- Small dimensions to appear invisible when installed on window surrounds
- Adapts to all window types and windowsill inclinations with accurate adjustments inside the fixing plate



Photographs, line drawings and photometric data are representative only. For specific product detail please select an individual product.

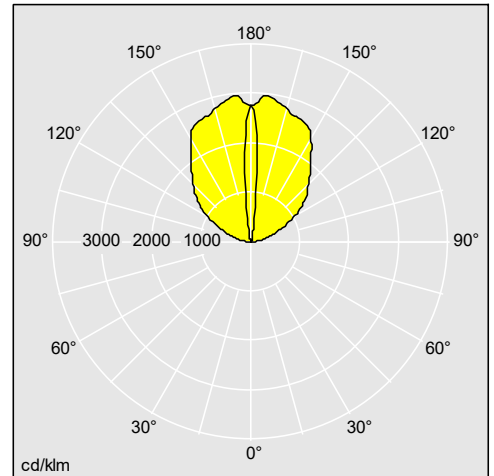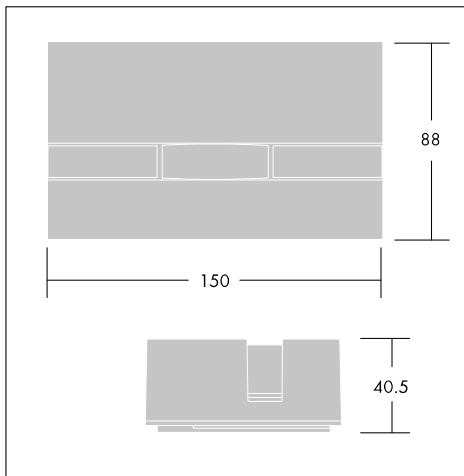

96271769

Material/Finish

Product body front: painted die-cast aluminium (AB47100) with high corrosion resistance. Marine environment resistance as standard. Light grey (close to RAL 9006) and dark grey (close to RAL 9007). Other RAL colours available on request (minimum order of 20 pieces)

Front glass: polycarbonate

Cable: 1,5m HO5RN-F - 3x1mm²

Screws: A4 grade stainless steel screws with 2,5-3% molybdenum content for better corrosion resistance.

Installation/Mounting

Suitable for surface mounting using screws (not supplied). Ceiling installation is possible. Supplied with 1,5m HO5RN-F - 3 x 1mm² cable. Carefully position prior to fixing. Vioo can be precisely adjusted using 2 Allen keys. Through wiring is not possible.

Specification

To specify state:

Small floodlight with ellipsoidal light beam for window surround illumination, indoor and outdoor use, two body colours and two colour temperature versions (3000K/4000K).

As Thorn Vioo.

Vioo

Ordering Guide Product supplied complete with fixing plate, front, LED and cable.

Description	ILCOS Code	Socket	Wt (kg)	SAP Code
Vioo				
VIOO 1L120 830 L GRY	LED		0,71	96271766
VIOO 1L120 740 LGRY	LED		0,71	96271767
VIOO 1L120 830 ANT	LED		0,71	96271768
VIOO 1L120 740 ANT	LED		0,71	96271769