



Satin 2 Recessed

A discreet linear floodlight range offering extensive static/dynamic illumination choice and flexibility

- Compact body with integral power supply for monochromatic versions or external DMX box for RGBW versions
- Exceptional flexibility with a choice of LED colours, light distributions, lengths and installation possibilities
- High ambient temperature versions (+50°C) for warmer climates. Remote gear box available on request
- Side by side installation for a uniform light beam
- 6 kV surge protected as standard



Photographs, line drawings and photometric data are representative only. For specific product detail please select an individual product.

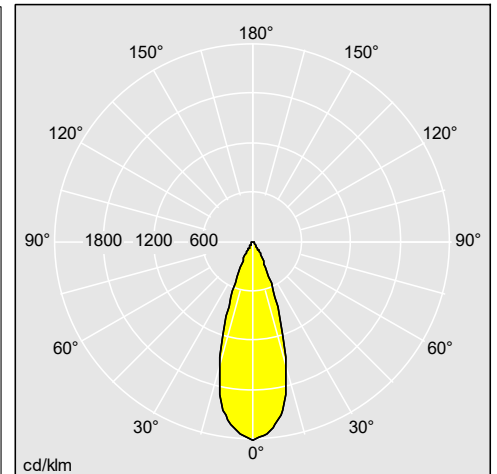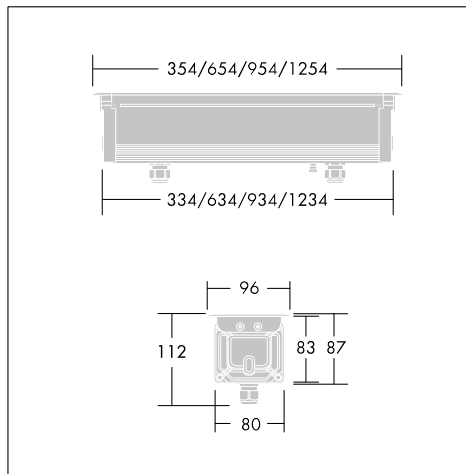

96267220

Satin 2 Recessed

Material/Finish

Monochromatic

Standard – All integral

Body: extruded aluminium (EN AW-6060 T6), painted silver grey

Side: painted die-cast aluminium, silver grey

Enclosure: tempered glass 10mm thick

Glue: 1 component MSP adhesive

Cable: 1m of H05RNF (2x1mm²)

High ambient temperature versions - Remote gear box

Body: extruded aluminium (EN AW 6060 T6) painted silver grey

Side: painted die-cast aluminium, silver grey

Enclosure: tempered glass 10mm thick

Glue: 1 component MSP adhesive

Cable: 1m of 2x1mm² H05RNF cable

Connection box monochromatic: die-cast aluminium (EN AB 47100)

painted textured silver grey

Cable glands: brass

Gasket: rubber/neoprene

Screws: stainless steel

RGBW:

Common to standard and high ambient temperature versions –

Remote gear box

Body: extruded aluminium (EN AW-6060 T6), painted silver grey

Side: painted die-cast aluminium, silver grey

Enclosure: tempered glass 10mm thick

Glue: 1 component MSP adhesive

Cable: 1m of Profiplast CSA 5x1,0mm² for DMX versions

Connection box RGBW: die-cast aluminium (EN AB 47100), painted textured silver grey

Cable glands: brass

Gasket: rubber/neoprene

Screws: stainless steel

Inground recessed boxes for recessed versions without angle adjustments

Box and aligners : galvanized stainless steel

Screws : stainless steel

Protective insert: polystyrene

Installation/Mounting

Recessed monochromatic standard versions with integral driver

Suitable only for recessed installation without light beam angle adjustment. Install the inground recessed box in ground in line or independently. Clip the Satin2 recessed body inside the recessed box. All standard monochromatic recessed versions are pre-wired with H05RNF cable 1m long for mains. One cable gland for IN versions and two cable glands for IN/OUT versions. The mains wires have a plastic cap to avoid injuries. This cap needs to be cut before through wiring installation.

Recessed monochromatic high ambient temperature versions

Remote gear box and cable 1m of H05RNF (2x1mm²) for mains connections

Recessed RGBW versions common to standard and high ambient temperature versions

Remote gear box and cable 1m of Profiplast CSA 5x1,0mm² for DMX versions

Inground recessed box for recessed versions

IK10, Static load: 500kg, No angle adjustments. Closing: anti-vandal clips

Satin 2 Recessed

Specification

To specify state:

Compact linear floodlight range for static or dynamic illumination applications with choice of four lengths (330/350/430mm, 630/650mm, 930/950mm mm and 1230/1250mm), four light distributions (12°, 12x44°, 32° and asymmetric), six LED colours (Red, Green, Blue, 3000K, 4000K and RGBW), three installation types (surface and ground recessed box with angle adjustments and in ground recessed box without angle adjustment) and through wiring or end of line versions. 5700K, amber and dimmable white versions on request.

As Thorn Satin 2.