



Hipak G2

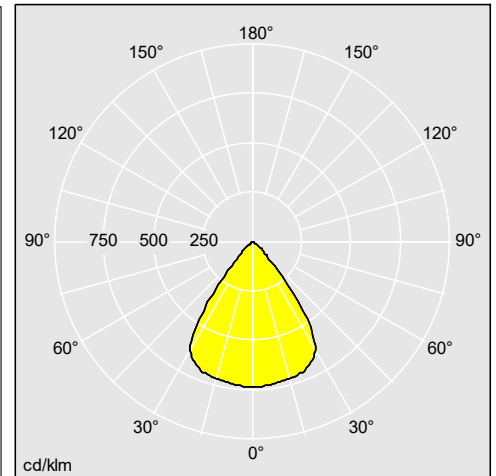

Photographs, line drawings and photometric data are representative only. For specific product detail please select an individual product.

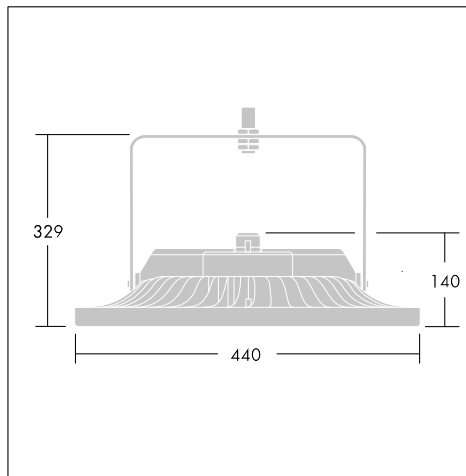

96665369

Material/Finish

Housing: Die cast aluminium (RAL 9006)

Lens/Diffuser: Polycarbonate

Luminaire is silicon free

Installation/Mounting

All luminaires are suitable for single point suspension. All wide optic luminaires are supplied with a mounting hook as standard (chain to be ordered separately: 96502605). For rack optic luminaires it is recommended to use the fixed rod suspension or surface wall mounting accessory (to be ordered separately). Mounting accessories to be ordered separately: stirrup for wall mounting (96642765 / 96642914), rod suspension for pendant mounting (96642766), wire suspension (96502609) and catenary suspension (96502610). All luminaires are supplied pre-wired with a quick connector plug.

Specification

To specify state:

An IP65 single point suspension LED high bay luminaire with plug and play connection for rapid installation. Available in 10000lm, 15000lm, 20000lm and 25000lm, with a choice of rack or wide beam optic. Fixed output (HF) and DALI available as standard.

As Thorn HiPak.