
Tonic Gimbal

Cost effective CRI90 LED recessed spotlight range with multivoltage driver for worldwide use and global availability

- A spotlight for recessed installation to achieve an attractive clean ceiling structure, that features all environments and integrates well with a wide range of architectural styles
- The highly efficient optical system on the front also protects the LED light source and allows easy cleaning
- LED spotlight family with global certification (CE, CCC, EAC) and world-wide availability
- The range is easy to understand and specify with clear product options



Photographs, line drawings and photometric data are representative only. For specific product detail please select an individual product.

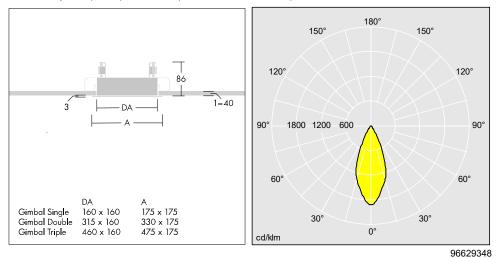

Material/Finish

Spot head / installation frame / installation flags: aluminium Lens / spot housing / front ring: polycarbonate

Installation/Mounting

Secure recessed fixing with flag design

Specification

To specify state:

Recessed LED spotlight with colour rendering Ra >90 and world wide driver for use with single, double or triple installation frame. Available in 3000K and 4000K with four different beam shapes. Chromaticity tolerance (initial MacAdam): 3; Lifetime performance: 50000 h L70; world wide mains input voltage range 100-240V at 50/60Hz; anti-glare ring in housing color; highly efficient and iridescence-free facetted lenses; installation frame with secure flag design for highest security fixing.

As Thorn Tonic Gimbal