


## Cesar Ceiling

### Cylindrical ceiling floodlight

- Ceiling surface mounted luminaire with medium beam. Available in 2 sizes for easy integration into any environment
- Easy installation with a single tool and automatic connection
- Also available as a wall variant with Cesar Wall range



*Photographs, line drawings and photometric data are representative only. For specific product detail please select an individual product.*

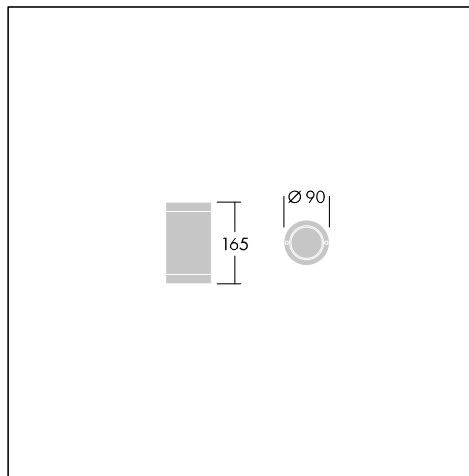

### Material/Finish

Body and frame: die-cast aluminium EN AN 44700 and extruded ENAW 6060 housing (copper free) with high corrosion resistance and powdered painted close to RAL 7043 with corrosion resistance. Other RAL colours available on request.  
 Front glass: toughened glass, thickness 8mm  
 Retaining screws: stainless steel  
 Gasket: silicone  
 Holographic films: non-yellowing polycarbonate

### Installation/Mounting

Fix the plate to the ceiling with screws (not supplied). Connect the supply cable to the fast connector IP67(supplied). Plug the fast connector and lock with the two Allen screws. Fast connectors for electrical connection, cable diameters: Size 1: 8-12mm; Sizes 2: 6-12mm

### Specification

To specify state:

Cylindrical down-light luminaire for decorative or path lighting. Available in 2 sizes, IP65 protected, gear integrated. Size 1: Ø90mm diameter; Size 2: Ø140mm.

As Thorn Cesar Ceiling