




Quattro +

Recessed T26 (T8) fluorescent luminaires designed specifically for 625x625mm exposed grid ceilings.

- Square and linear options for integration into different ceiling types
- Versions with dimmable, analogue or digital control, control gear to special order
- Choice of mirrorbrite louvres for low glare applications or general purpose louvres



Photographs, line drawings and photometric data are representative only. For specific product detail please select an individual product.

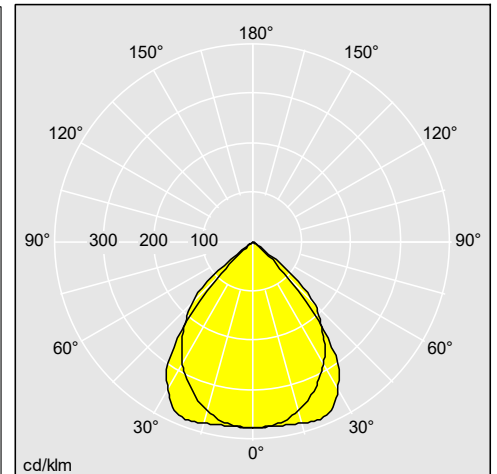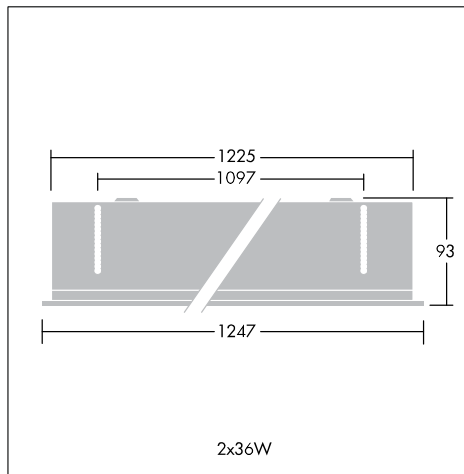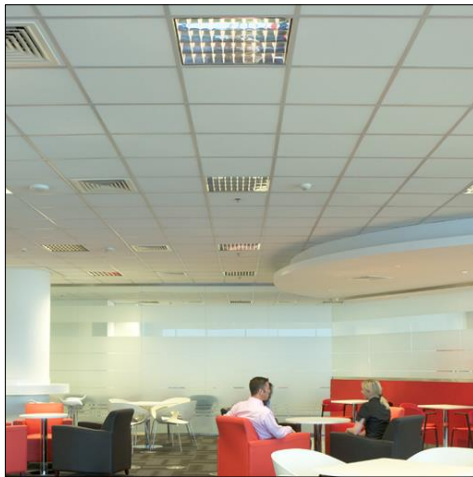

96009928

Material/Finish

Body: white painted steel close to RAL 9010
Louvre: low iridescent aluminium

Installation/Mounting

Quick and easy to install in exposed tee ceilings using "wedge" support brackets. Attachments are held in place by wishbone springs which act as hinges for hands free maintenance and ensure continuous earthing.

Specification

To specify state:

Recessed DIN modular fluorescent luminaire for use in exposed tee ceilings for "perfect fit" appearance with Mirrorbrite <200cd/m² /low brightness louvres, continuous earth contact between body and louvre.

As Thorn Quattro +.