



PE

A range of curved profile T26 (T8) fluorescent luminaires with clear or opal diffusers, sealed to IP44

- Wide light distribution with a high proportion of vertical light
- Available with or without cable for through wiring
- Wide selection of products for various applications
- Surface or suspended mounting



Photographs, line drawings and photometric data are representative only. For specific product detail please select an individual product.

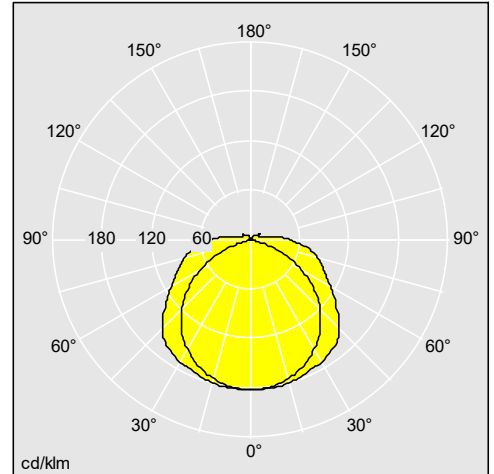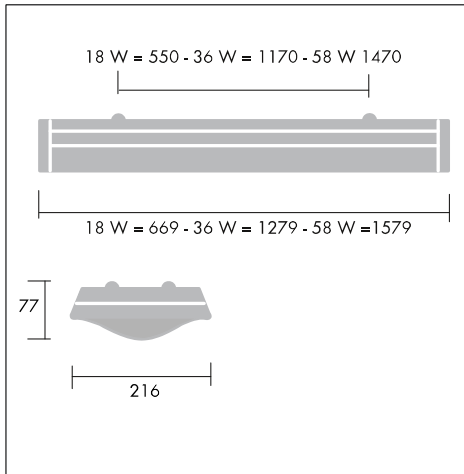

96186384

Material/Finish

Body: Galvanised steel sheet pre painted white.

End caps: White impact resistant plastic (ASA).

Diffuser: Clear or opal plastic diffuser with refractors for best possible light distribution.

Installation/Mounting

Mounting: Surface mounted, or suspended by wire, chain, suspension wire or brackets.

Both end caps has grommets Ø 19mm. Through wiring versions also have 2 cable entry holes Ø 19mm at the centre of the top of the luminaire (not 2 x 18 HF).