

Quattro T5

THORN


96549489 <QUATROT5 3x14W T16 HFIX E3TX WL6/3 FEFL

T _{p(a)}					850°C	T _a 25
-------------------	--	--	--	--	-------	-------------------


Quattro T5

Recessed modular luminaire, with 3 hour emergency SelfTest or Addressable Test if connected to Explorer Project/Vision, for 3 x 14W T16 lamps with Electronic, circuit DALI dimmable control gear. Body in white painted steel with clear prismatic polyethylene terephthalate glycol diffuser panel in fabricated white polyvinyl chloride frame (UK Building Regs Part B2 class TP[a] - 850°C). Lays into most exposed grid ceiling systems and can be installed into concealed fix ceilings with mini-wedge suspension brackets (supplied). Electrical connection via factory fitted 6 pole GST "T" connector, with additional 3 pole red GST male connector for Explorer Project. Lamps to be ordered separately..

Dimensions: 597 x 597 x 59 mm
Total power: 46.5 W
Weight: 4.9 kg

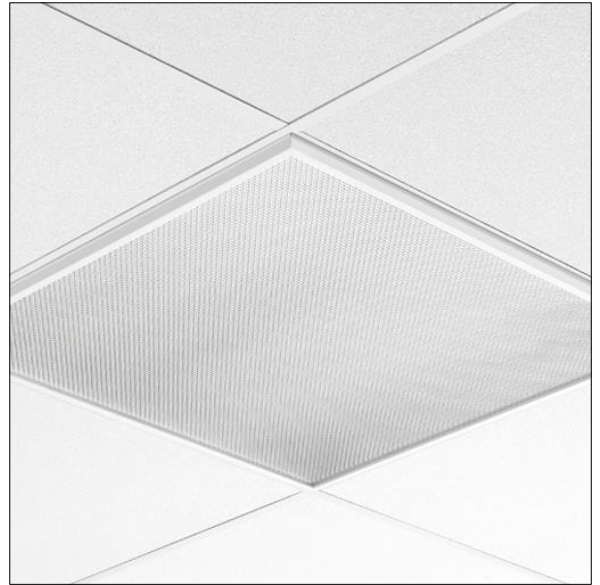

TLG_QUAT_F_T54X14WFEFL.jpg

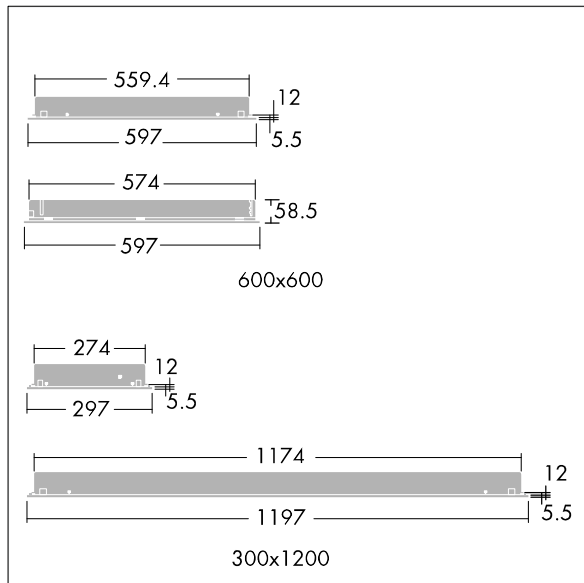

TLG_QTR5_M_LD1.wmf

All values marked with an * are rated values. Unless stated otherwise, the values apply to an ambient temperature of 25°C.

Thorn Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement.
© Thorn Lighting