

96644006 NOVALINE LED2500-830 MWS RF CHR

IP40	IK02					850°C
------	------	--	--	--	--	-------


Novaline

A round bulkhead LED luminaire. Electronic, fixed output control gear. Body and bezel: chrome finish, spun aluminium. Diffuser: opal polycarbonate. Class I electrical, IP40. With integral motion sensor for on/off control and radio frequency module (Master). Complete with 3000K LED.

Dimensions: Ø455 x 105 mm
 Total power: 22.5 W
 Luminaire luminous flux: 2250 lm
 Luminaire efficacy: 100 lm/W
 Weight: 2.33 kg



TLG_NOVN_F_1000LEDWALLPDB.jpg

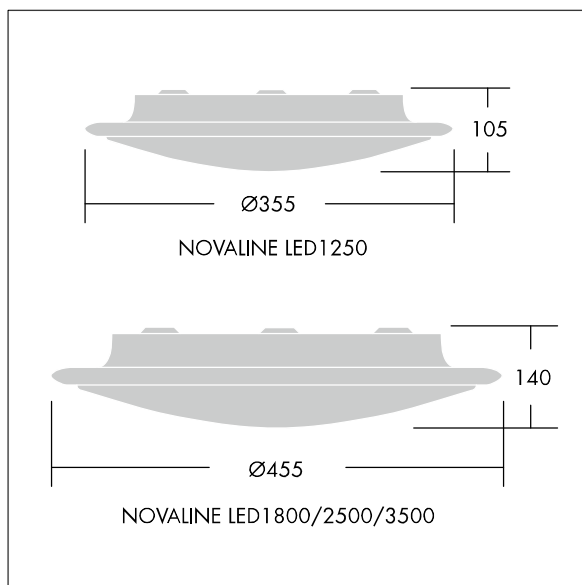

TLG_NOVN_M_LED2.wmf

All values marked with an * are rated values. Thorn uses tried and tested components from leading suppliers, however there may be isolated instances of technology-related failures of individual LEDs during the rated product lifetime. International standards set the tolerance in initial flux and connected load at ±10%. Colour temperature is subject to a tolerance of up to +/-150 Kelvin from the nominal value. Unless stated otherwise, the values apply to an ambient temperature of 25°C.

In most products the failure of one LED point causes no functional impairment to the lighting performance of the luminaire and is therefore no reason for complaint. Unless otherwise stated all Thorn LED products are suitable for unrestricted use (rated RG0 or RG1) with regard photobiological blue light safety (IEC/EN60598-1).

Thorn Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement.
 © Thorn Lighting

Novaline

96644006 NOVALINE LED2500-830 MWS RF CHR

THORN