

## D-CO Bollard

96262101 D-CO LED BOLLARD 700 30L50 830 CL1

|                |      |      |   |    |   |     |    |    |                   |
|----------------|------|------|---|----|---|-----|----|----|-------------------|
| ISO 9223<br>C3 | IP65 | IK10 | ⊕ | CE | ⚡ | EAC | ⚙️ | ☀️ | T <sub>a</sub> 50 |
|----------------|------|------|---|----|---|-----|----|----|-------------------|


### D-CO Bollard

A timeless LED bollard. Electronic, fixed output control gear. Class I electrical, IP65. Top and body: aluminium powder coated grey 900. Diffuser: semi-opal anti-UV polycarbonate. Suitable for flange mounting or with root spike (available separately). Complete with 3000K LED

Dimensions: Ø150 x 700 mm  
 Luminaire input power: 14 W  
 Weight: 4.15 kg



TLG\_DCOL\_F\_LEDBOLLARDLIT.jpg

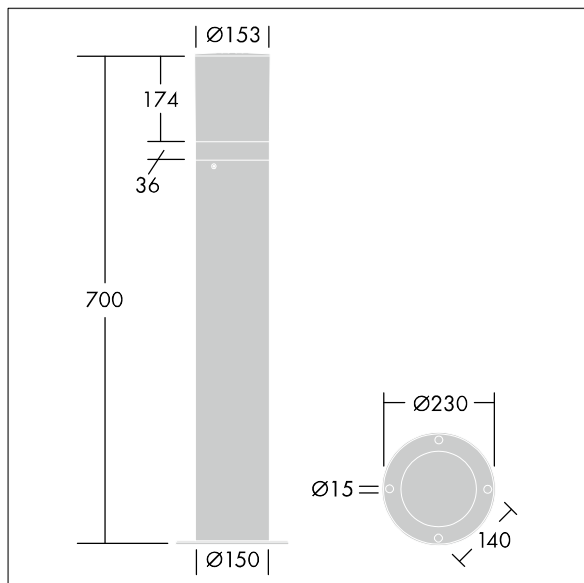

TLG\_DCOB\_M\_BOLN.wmf

This product contains a light source of energy efficiency class F.

All values marked with an \* are rated values. Thorn uses tried and tested components from leading suppliers, however there may be isolated instances of technology-related failures of individual LEDs during the rated product lifetime. International standards set the tolerance in initial flux and connected load at ±10%. Unless stated otherwise, the values apply to an ambient temperature of 25°C.

## D-CO Bollard

96262101 D-CO LED BOLLARD 700 30L50 830 CL1

THORN