

# R2L2

# THORN

96266400 R2L2 M 60L35 730 WS CL2 GY

|                |                          |      |      |  |    |  |     |  |  |                           |
|----------------|--------------------------|------|------|--|----|--|-----|--|--|---------------------------|
| ISO 9223<br>C5 | ida<br>dark sky APPROVED | IP66 | IK08 |  | CE |  | EAC |  |  | T <sub>a</sub> -25<br>+50 |
|----------------|--------------------------|------|------|--|----|--|-----|--|--|---------------------------|


## R2L2

A medium size LED road lighting lantern with 60 LEDs driven at 350mA with Wide Street optic. LED driver Programmable. Class II electrical, IP66, IK08. Housing: die-cast aluminium, powder coated textured light grey. Enclosure: tempered flat glass. Screws: stainless steel, Ecolubric® treated. Post top (Ø60/76mm, tilted 0°/5°/10°) or lateral (Ø34/42/49/60mm, tilted 0°/-5°/-10°/-15°) mounting. For lateral mounting to Ø34/42mm spigots an adaptor (59005840 R2L2 MA34/42 NPA) should be ordered separately. Complete with 3000K LED.

Dimensions: 880 x 370 x 155 mm  
Luminaire input power: 63 W  
Luminaire luminous flux: 9236 lm  
Luminaire efficacy: 147 lm/W  
Weight: 12.67 kg  
Scx: 0.06 m<sup>2</sup>



TLG\_R2L2\_F\_MPDB.jpg

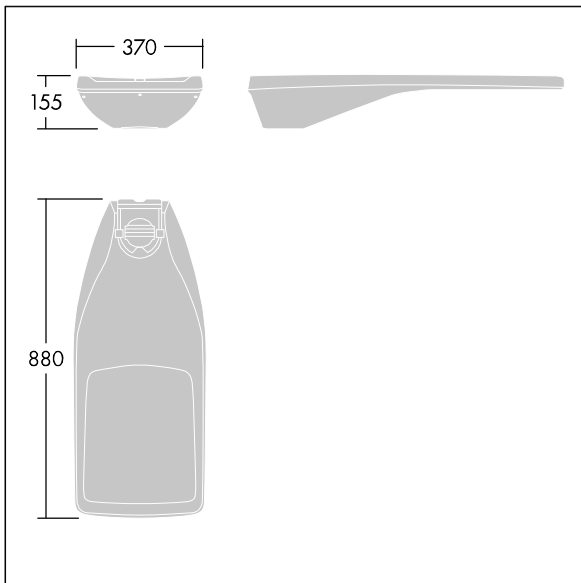

TLG\_R2L2\_M\_LDM.wmf

This product contains light sources of energy efficiency class D.

All values marked with an \* are rated values. Thorn uses tried and tested components from leading suppliers, however there may be isolated instances of technology-related failures of individual LEDs during the rated product lifetime. International standards set the tolerance in initial flux and connected load at ±10%. Unless stated otherwise, the values apply to an ambient temperature of 25°C.

Thorn Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement.  
© Thorn Lighting

**R2L2**

**96266400 R2L2 M 60L35 730 WS CL2 GY**

**THORN**