

## IQ Wave

92900266 IQ WAVE LED4100-840 HFIX E3 Q597 MRE

↓ IP20 ↑ IP44	IK03	⊕	CE	⚠	🔧	⊗	650°C	T <sub>a</sub> 0 +25
------------------	------	---	----	---	---	---	-------	-------------------------


### IQ Wave

Recessed modular, direct LED luminaire. Electronic, DALI dimmable control gear with 3 hour, manual test, emergency lighting circuit. Class I electrical, IP44 IP20, IK03. Body: highly reflective steel. Frame and end caps: polycarbonate. Diffuser: polycarbonate with aluminium heatsink. Gear tray: powder coated white steel. Suitable for lay in or pull up (with accessory) installation. Complete with 4000K LED

Dimensions: 597 x 597 x 97 mm  
 Luminaire input power: 40 W  
 Luminaire luminous flux: 4250 lm  
 Luminaire efficacy: 106 lm/W  
 Weight: 4.4 kg



TLG\_IQWV\_F\_PDB.jpg

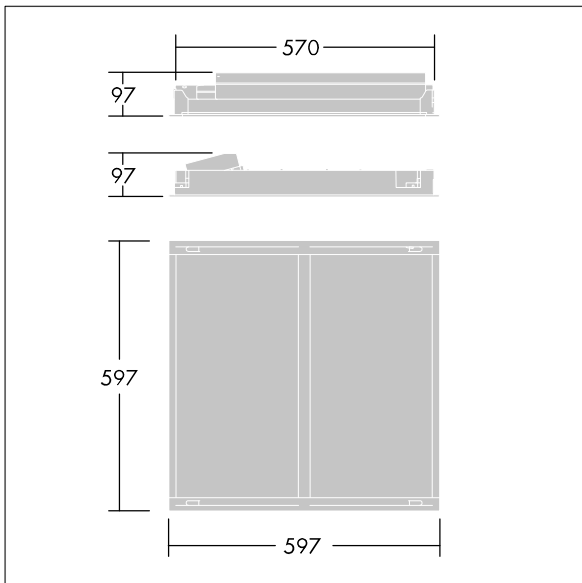

TLG\_IQWV\_M\_600.wmf

This product contains a light source of energy efficiency class D.

All values marked with an \* are rated values. Thorn uses tried and tested components from leading suppliers, however there may be isolated instances of technology-related failures of individual LEDs during the rated product lifetime. International standards set the tolerance in initial flux and connected load at ±10%. Unless stated otherwise, the values apply to an ambient temperature of 25°C.

**IQ Wave**

**92900266 IQ WAVE LED4100-840 HFIX E3 Q597 MRE**

**THORN**