

# Durolight

# THORN

96633057 <DUROLIGHT-R 4300-840 HF E3 L1250

IP65	IK10	⊕	CE			850°C		170Nm	T <sub>a</sub> -25 +50
------	------	---	----	--	--	-------	--	-------	---------------------------


## Durolight

Anti-vandal Recessed LED luminaire. Electronic, fixed output control gear with 3 hour, manual test, emergency lighting circuit. IP65, IK10, Class I electrical. Body: 2mm sheet steel painted white (close to RAL9016). Gasket: non-ageing polyurethane foam. Diffuser: 3mm thick polycarbonate with outstanding impact resistance, connected and secured with tamper-resistant stainless steel twin hole screws to the body. Complete with 4000K LED

Dimensions: 1225 x 300 x 115 mm  
Luminaire input power: 38 W  
Luminaire luminous flux: 4253 lm  
Luminaire efficacy: 112 lm/W  
Weight: 14 kg



TLG\_DURO\_F\_MRE.jpg

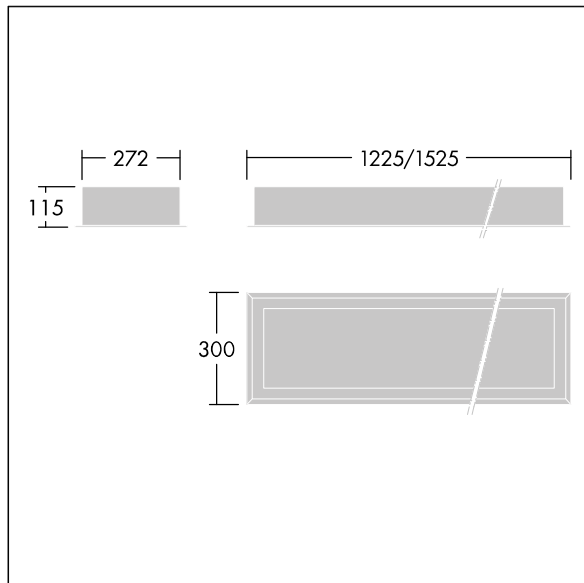

TLG\_DURO\_M\_LDR.wmf

This product contains a light source of energy efficiency class C.

All values marked with an \* are rated values. Thorn uses tried and tested components from leading suppliers, however there may be isolated instances of technology-related failures of individual LEDs during the rated product lifetime. International standards set the tolerance in initial flux and connected load at ±10%. Unless stated otherwise, the values apply to an ambient temperature of 25°C.

Thorn Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement.  
© Thorn Lighting

**Durolight**

**96633057 <DUROLIGHT-R 4300-840 HF E3 L1250**

**THORN**