

# Durolight

THORN

## 96633079 DUROLIGHT-C 3500-830 HFIX L1215

IP65	IK10					850°C		170Nm	T <sub>a</sub> -25 +45
------	------	--	--	--	--	-------	--	-------	---------------------------


### Durolight

Anti-vandal Surface mounted cornice LED luminaire.  
Electronic, DALI dimmable control gear. IP65, IK10, Class I electrical. Body: 2mm sheet steel painted white (close to RAL9016). Gasket: non-ageing polyurethane foam. Diffuser: 3mm thick polycarbonate with outstanding impact resistance, connected and secured with tamper-resistant stainless steel twin hole screws to the body. Complete with 3000K LED

Dimensions: 1215 x 175 x 175 mm  
Luminaire input power: 37.6 W  
Luminaire luminous flux: 3454 lm  
Luminaire efficacy: 92 lm/W  
Weight: 11 kg



TLG\_DURO\_F\_CORNER.jpg

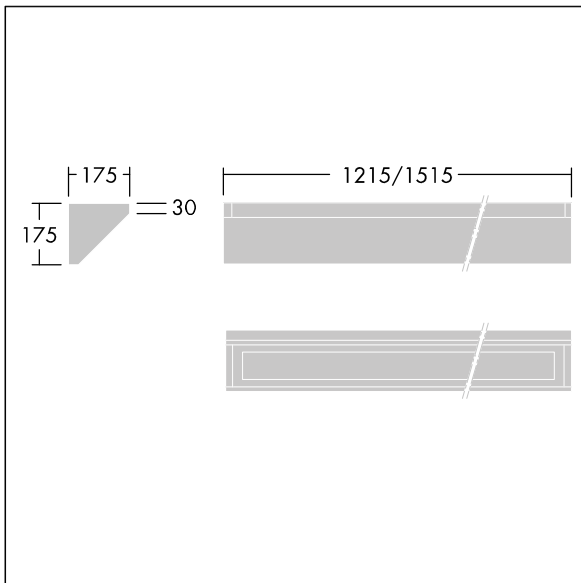

TLG\_DURO\_M\_LDC.wmf

This product contains a light source of energy efficiency class C.

All values marked with an \* are rated values. Thorn uses tried and tested components from leading suppliers, however there may be isolated instances of technology-related failures of individual LEDs during the rated product lifetime. International standards set the tolerance in initial flux and connected load at  $\pm 10\%$ . Unless stated otherwise, the values apply to an ambient temperature of 25°C.

Thorn Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement.  
© Thorn Lighting

**Durolight**

**96633079 DUROLIGHT-C 3500-830 HFIX L1215**

**THORN**