

Similo

THORN

96632803 SIMILO RECT 28L50 930 CL1 ANT

| | | | | |
|------|------|---|---|---------------------------|
| IP65 | IK08 |  |  | T _a -20 +25 |
|------|------|---|---|---------------------------|

Similo

A slim, rectangular, surface / Wall mounted LED luminaire for pathway lighting, with 28 LEDs driven at 500mA by an integral driver. Class I electrical, IP65, IK08. Housing: die-cast aluminium (EN AB-47100 with low copper content for high corrosion resistance) finished textured anthracite. Diffuser: toughened glass. Screws: stainless steel. Complete with 3000K LED.

Dimensions: 270 x 115 x 30 mm

Luminaire input power: 13 W


Luminaire luminous flux: 421 lm

Luminaire efficacy: 32 lm/W

Weight: 1.27 kg



TLG_SIMI_F_REC.jpg

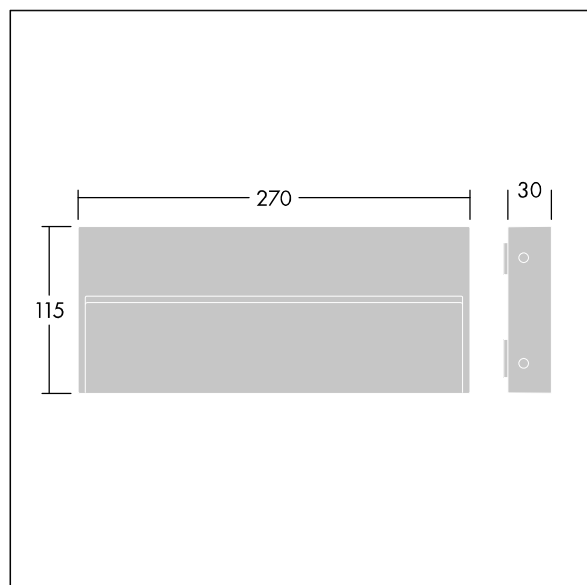

TLG_SIMI_M_REC.wmf

This product contains a light source of energy efficiency class E.

All values marked with an * are rated values. Thorn uses tried and tested components from leading suppliers, however there may be isolated instances of technology-related failures of individual LEDs during the rated product lifetime. International standards set the tolerance in initial flux and connected load at $\pm 10\%$. Unless stated otherwise, the values apply to an ambient temperature of 25°C.

Thorn Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement.
© Thorn Lighting