

# D-CO Bollard

THORN

## 96262145 D-CO LED BOLLARD 1000 30L50 840 CL1

ISO 9223 C3	IP65	IK10	⏚	CE	⚡	EAC	⚡	⚡	T <sub>a</sub> 50	
----------------	------	------	---	----	---	-----	---	---	-------------------	--

### D-CO Bollard

A timeless LED bollard. Electronic, fixed output control gear. Class I electrical, IP65. Top and body: aluminium powder coated grey 900. Diffuser: semi-opal anti-UV polycarbonate. Suitable for flange mounting or with root spike (available separately). Complete with 4000K LED


Dimensions: Ø150 x 1000 mm

Luminaire input power: 14 W

Weight: 5.45 kg



TLG\_DCOL\_F\_LEDBOLLARDLIT.jpg

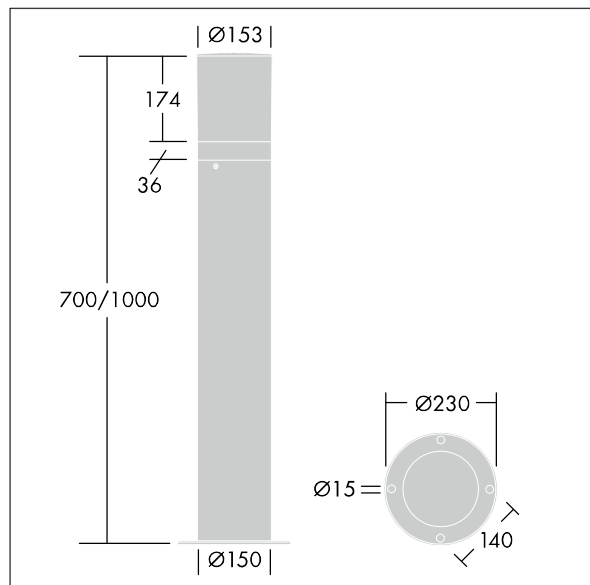

TLG\_DCOB\_M\_BOL.wmf

This product contains a light source of energy efficiency class F.

All values marked with an \* are rated values. Thorn uses tried and tested components from leading suppliers, however there may be isolated instances of technology-related failures of individual LEDs during the rated product lifetime. International standards set the tolerance in initial flux and connected load at  $\pm 10\%$ . Unless stated otherwise, the values apply to an ambient temperature of 25°C.

Thorn Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement.  
© Thorn Lighting

## **D-CO Bollard**

**96262145 D-CO LED BOLLARD 1000 30L50 840 CL1**

THORN