

D-CO Bollard

THORN

96262146 D-CO LED BOLLARD 700 30L50 840 CL1

ISO 9223 C3	IP65	IK10	⊕	CE	△	EAC	⚡	☀	T _a 50	
----------------	------	------	---	----	---	-----	---	---	-------------------	--

D-CO Bollard

A timeless LED bollard. Electronic, fixed output control gear. Class I electrical, IP65. Top and body: aluminium powder coated grey 900. Diffuser: semi-opal anti-UV polycarbonate. Suitable for flange mounting or with root spike (available separately). Complete with 4000K LED


Dimensions: Ø150 x 700 mm

Luminaire input power: 14 W

Weight: 4.15 kg



TLG_DCOL_F_LEDBOLLARDLIT.jpg

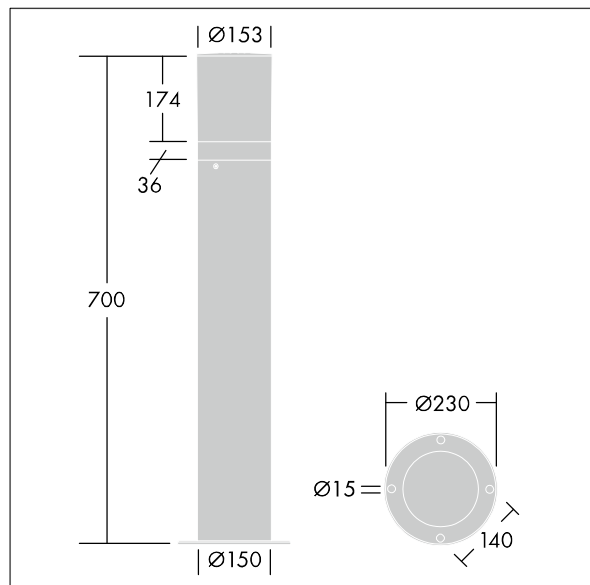

TLG_DCOB_M_BOLN.wmf

This product contains a light source of energy efficiency class F.

All values marked with an * are rated values. Thorn uses tried and tested components from leading suppliers, however there may be isolated instances of technology-related failures of individual LEDs during the rated product lifetime. International standards set the tolerance in initial flux and connected load at $\pm 10\%$. Unless stated otherwise, the values apply to an ambient temperature of 25°C.

Thorn Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement.
© Thorn Lighting

D-CO Bollard

96262146 D-CO LED BOLLARD 700 30L50 840 CL1

THORN