

# Legend

THORN

## 96262621 LEGEND 36L50 RC 730 RPF CL2 T60



### Legend

A modern heritage LED lantern with perforated optic creating decorative illumination on the top of the lantern. Electronic,. Class II electrical, IP65, IK08. Body: grey 900 finish (close to RAL 7043). Enclosure:.. Surge protection: 10kV single pulse common mode and 8kV multipulse common mode and 6kV multipulse differential mode. If permanent DALI system is connected, 6kV multipulse common and differential mode. Complete with 3000K LED.

Dimensions: 446 x 446 x 999 mm


Luminaire input power: 55 W

Weight: 17.6 kg

Scx: 0.14 m<sup>2</sup>



TLG\_LGND\_F\_CLS.jpg

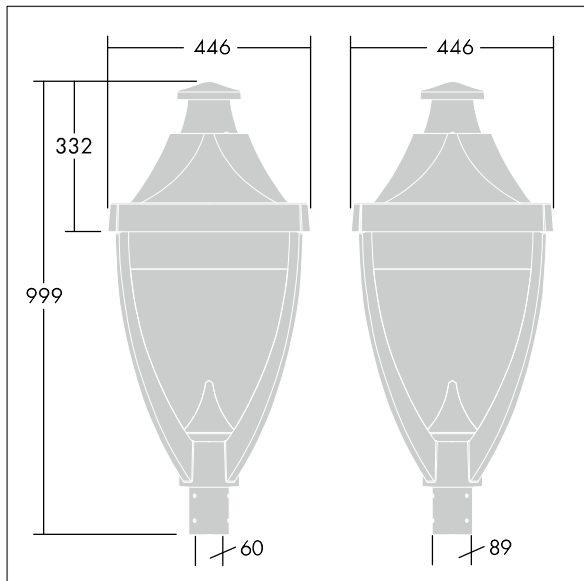

TLG\_LGND\_M\_MTP.wmf

This product contains light sources of energy efficiency class D.

All values marked with an \* are rated values. Thorn uses tried and tested components from leading suppliers, however there may be isolated instances of technology-related failures of individual LEDs during the rated product lifetime. International standards set the tolerance in initial flux and connected load at  $\pm 10\%$ . Unless stated otherwise, the values apply to an ambient temperature of 25°C.

Thorn Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement.  
© Thorn Lighting

## Legend

96262621 LEGEND 36L50 RC 730 RPF CL2 T60

THORN