

# Linn

# THORN

**96262126 LINN RCT LED 6L50 832**  
+ 96262133 LINN RCT FR GL FRAME  
+ 96264336 LINN RCT BOLLARD EXTENSION

IP65	IK10					850°C	T <sub>a</sub> 35
------	------	--	--	--	--	-------	-------------------

## Linn

A rectangular, Recessed LED luminaire for pathway lighting applications. Electronic, fixed output control gear. Class I electrical, IP65, IK10. Body: die-cast aluminium, painted dark grey (Akzo Nobel 900). Glass: tempered glass, 8mm thick. Recessed housing (required, to be ordered separately): polypropylene. Complete with 3200K LED

Dimensions: 102 x 229 x 92 mm

Weight: 0.67 kg

Equipped with:  
Frosted glass frame for rectangular Linn luminaire.


Equipped with:  
Bollard mounting accessory for Linn rectangular luminaires.  
Body: die-cast aluminium, powder coated dark grey.

Dimensions: 239 x 92 x 550 mm

Weight: 4.35 kg



TLG\_LINN\_F\_RECTPDB.jpg

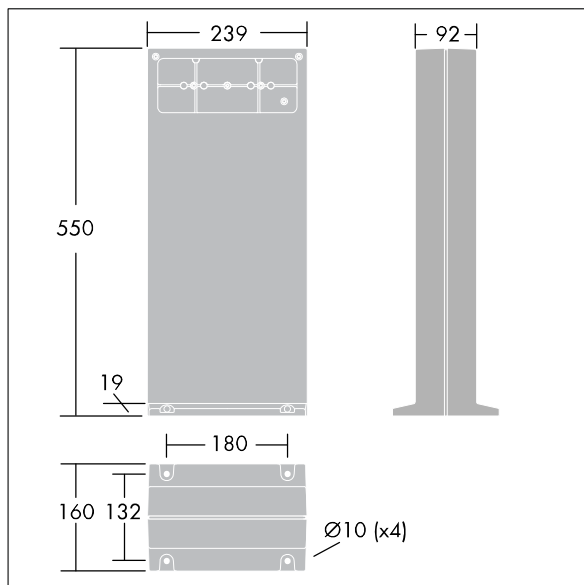

TLG\_LINN\_M\_LDBOLCOMF.wmf

All values marked with an \* are rated values. Thorn uses tried and tested components from leading suppliers, however there may be isolated instances of technology-related failures of individual LEDs during the rated product lifetime. International standards set the tolerance in initial flux and connected load at  $\pm 10\%$ . Unless stated otherwise, the values apply to an ambient temperature of 25°C.

Thorn Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement.  
© Thorn Lighting

**Linn**

**96262126 LINN RCT LED 6L50 832**

**+ 96262133 LINN RCT FR GL FRAME**

**+ 96264336 LINN RCT BOLLARD EXTENSION**

**THORN**