

MovU PIR Lateral

96270763 LEGEND 36L70 740 CL2 COR T60 W5M

THORN



MovU PIR Lateral coordinated luminaires

A modern heritage suspended LED lantern with.
Electronic,. Class II electrical, IP65, IK08. Body: die-cast aluminium powder coated grey 900 textured finish (close to RAL 7043). Enclosure: flat toughened glass. Complete with 3000K LED.

Dimensions: 446 x 446 x 1004 mm


Luminaire input power: 84 W

Weight: 17.5 kg

Scx: 0.14 m²



TLG_LGND_F_CLS.jpg

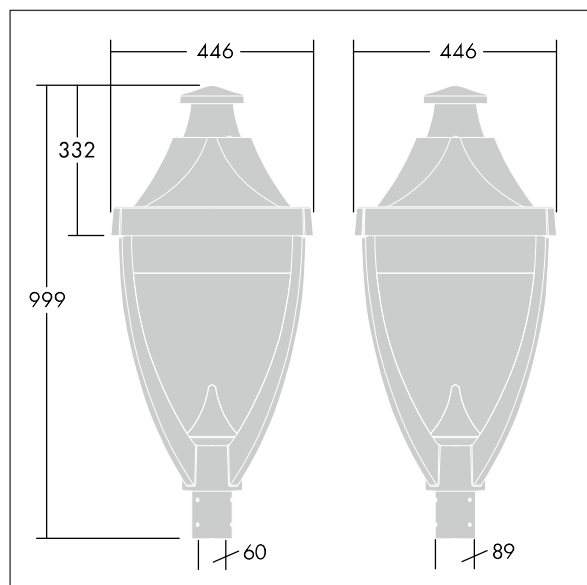

TLG_LGND_M_MTP.wmf

This product contains a light source of energy efficiency class D.

All values marked with an * are rated values. Thorn uses tried and tested components from leading suppliers, however there may be isolated instances of technology-related failures of individual LEDs during the rated product lifetime. International standards set the tolerance in initial flux and connected load at $\pm 10\%$. Unless stated otherwise, the values apply to an ambient temperature of 25°C.

Thorn Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement.
© Thorn Lighting

MovU PIR Lateral

96270763 LEGEND 36L70 740 CL2 COR T60 W5M

THORN