

MovU PIR Lateral

THORN

96270766 ISARO 36L70 NR EFL 740 CL1 COR MTP60 8M

IP66	IK08							
------	------	---	---	---	---	---	---	--


MovU PIR Lateral coordinated luminaires

An LED road and street lantern, designed for durability with narrow road distribution. Electronic, fixed output control gear. Class I electrical, IP66, IK08. Body: die-cast aluminium, powder coated grey. Bracket: die-cast aluminium, unpainted. Enclosure: flat glass. Suitable for post top mounting on Ø60mm spigot or side mounting on Ø49-60mm spigot. Variable tilting in 5° steps, post top: 0° to +10°, lateral: -20° to 0°. Cable gland for Ø8 to 12mm cable. Delivered, ready to install, in a single carton. Complete with 4000K LED

Luminaire input power: 79 W
Dimensions: 600 x 282 x 116 mm
Weight: 5.5 kg
Scx: 0.069 m²



TLG_ISRO_F_LEDMTPEFLPDB.jpg

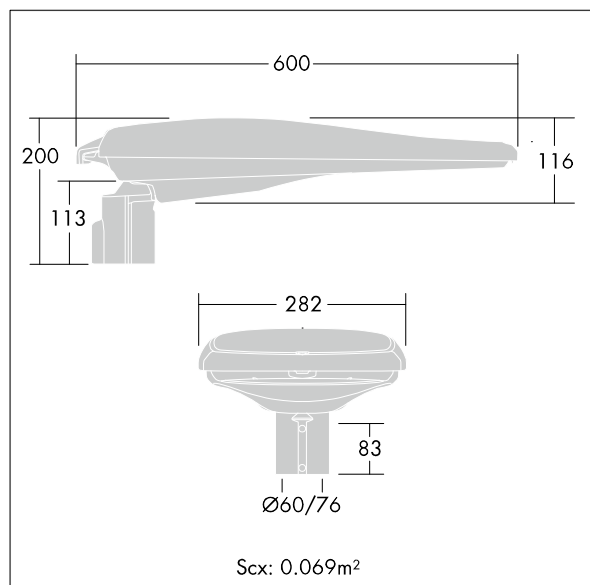

TLG_ISRO_M_LED.wmf

All values marked with an * are rated values. Thorn uses tried and tested components from leading suppliers, however there may be isolated instances of technology-related failures of individual LEDs during the rated product lifetime. International standards set the tolerance in initial flux and connected load at ±10%. Unless stated otherwise, the values apply to an ambient temperature of 25°C.

Thorn Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement.
© Thorn Lighting

MovU PIR Lateral

96270766 ISARO 36L70 NR EFL 740 CL1 COR MTP60 8M

THORN