







96642921 LYRIC DECO LED1550-840 HFI-X MWA-R OP


| | | | | | | | |
|------|---|---|---|---|---|---|--|
| IP20 |  |  |  |  |  |  | |
|------|---|---|---|---|---|---|--|

A stylish, curving tubular wall mounted LED luminaire with DALI dimmable control gear. Class I electrical, IP20.
Diffuser: opal glass. Complete with 4000K LED.

Dimensions: 200 x 95 x 300 mm
Luminaire input power: 12.4 W
Luminaire luminous flux: 1550 lm
Luminaire efficacy: 125 lm/W
Weight: 1.4 kg



TLG_LYRD_F_WALLPDB.jpg

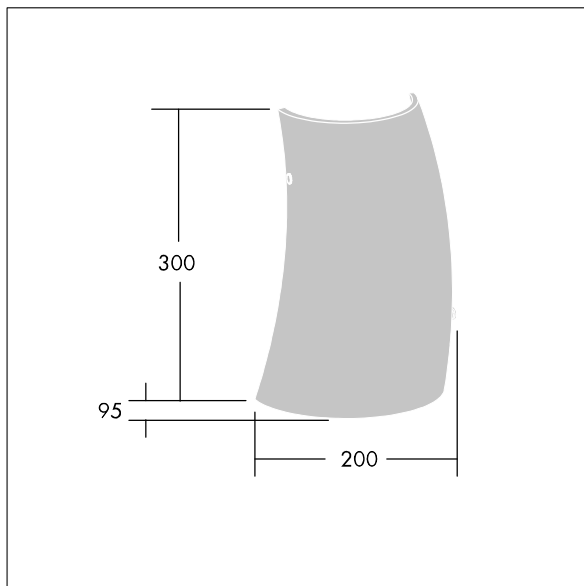

TLG_LYRD_M_DX_AP.wmf

This product contains a light source of energy efficiency class C.