

## 96643341 CQ 36L70 740 NR LRT CL2 DS6 T60F GY-S

|    |                |                |      |      |  |    |     |  |  |      |  |
|----|----------------|----------------|------|------|--|----|-----|--|--|------|--|
| CB | ISO 9223<br>C5 | PLUG<br>* 11 * | IP66 | IK08 |  | CE | EAC |  |  | Ta25 |  |
|----|----------------|----------------|------|------|--|----|-----|--|--|------|--|


### CiviTEQ

A small size LED road lighting lantern with 36 LEDs driven at 700mA with Narrow Road optic. Electronic, fixed output control gear. Class II electrical, IP66, IK08. Housing: die-cast aluminium (EN AC-44300), Light grey 150 sanded textured (close to RAL9006). Enclosure: toughened flat glass. Screws: stainless steel, Ecolubric® treated. Supplied with Ø60mm spigot adaptor pre-fitted for post-top, 5° tilt. Equipped with power reduction circuit, controlled by an additional switched phase cable. ON = 100%, OFF = 50%. Pre-wired with 6m cable for DACH market. Complete with 4000K LED. Surge protection: 10kV single pulse common mode and 8kV multipulse common mode and 6kV multipulse differential mode. If permanent DALI system is connected, 6kV multipulse common and differential mode.

Dimensions: 390 x 230 x 133 mm  
 Luminaire input power: 74.5 W  
 Luminaire luminous flux: 11747 lm  
 Luminaire efficacy: 158 lm/W  
 Weight: 5.7 kg  
 Scx: 0.077 m²



TLG\_CTEQ\_F\_SMTP36LEDPDB.jpg

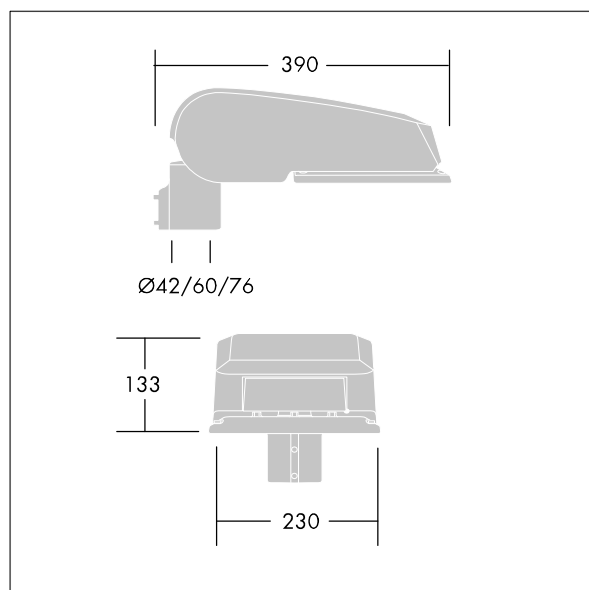

TLG\_CETQ\_M\_S.wmf

This product contains light sources of energy efficiency class E.