

96628133 IQ WAVE LED3100-840 HF Q597 MRE

| | | | | | | | | | | |
|----|--|----------------|------|--|----|--|--|-------|---------------------------|--|
| CB | | IP20 ↑ IP44 | IK03 | | CE | | | 650°C | T _a -20 +25 | |
|----|--|----------------|------|--|----|--|--|-------|---------------------------|--|


IQ Wave

Recessed modular, direct LED luminaire. Electronic, fixed output control gear. Class I electrical, IP44_IP20, IK03. Body: highly reflective steel. Frame and end caps: polycarbonate. Diffuser: polycarbonate with aluminium heatsink. Gear tray: powder coated white steel. Suitable for lay in or pull up (with accessory) installation. Complete with 4000K LED

Dimensions: 597 x 597 x 97 mm
Luminaire input power: 30 W
Luminaire luminous flux: 3200 lm
Luminaire efficacy: 107 lm/W
Weight: 3.8 kg



TLG_IQWV_F_PDBCEILING.jpg

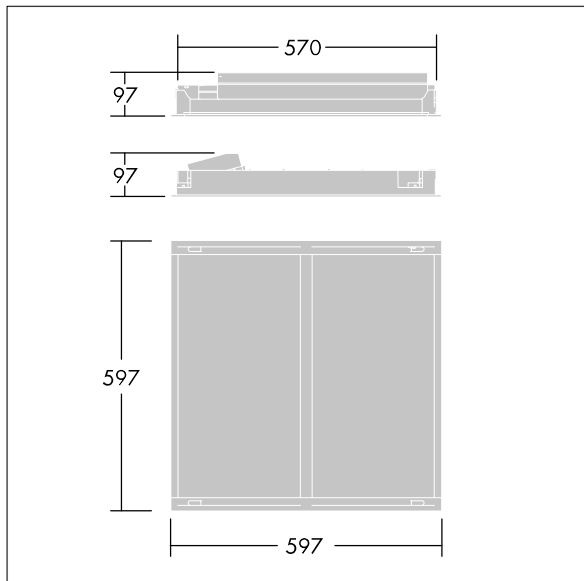

TLG_IQWV_M_600.wmf

This product contains a light source of energy efficiency class D.

IQ Wave

96628133 IQ WAVE LED3100-840 HF Q597 MRE

THORN