

**96643892 TR 48L50-740 NR BP CL2 OP W9 T60E**

ISO 9223 C5	IP66	IK08						T <sub>a</sub> 0 +25	
----------------	------	------	--	--	--	--	--	-------------------------	--

## Thor

A large size, smart urban LED lantern with 48 LEDs driven at 500mA with Narrow Road optic and UV stabilised polycarbonate dome with opal finish. Class II electrical, IP66, IK08. Body, bracket and ring: die-cast aluminium (AS12U, LM6 equivalent, EN AC-44300) treated against corrosion, powder coated anthracite (close to RAL7043). Enclosure: 4mm toughened flat glass. Screws and closing set: stainless steel. Pre-wired with 9m cable. Post top mounting to Ø60mm column, tilt 0°, adjustable from -15° to +10°. Equipped with power reduction circuit, effective 3 hours before and 5 hours after a calculated midnight. Complete with 4000K LED.

Dimensions: Ø577 x 155 mm

Luminaire input power: 79 W

Luminaire luminous flux: 10572 lm


Luminaire efficacy: 134 lm/W

Weight: 14.2 kg

Scx: 0.044 m<sup>2</sup>



TLG\_THRL\_F\_MTPOP0.jpg

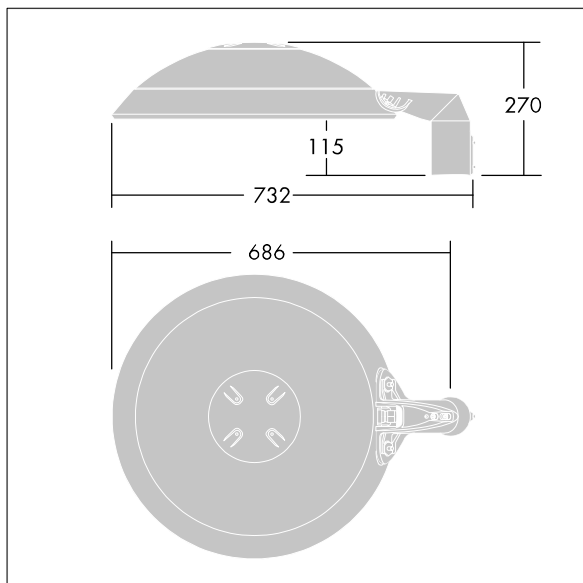

TLG\_THOR\_M\_PTOP.wmf

This product contains light sources of energy efficiency class D.

**Thor**

**96643892 TR 48L50-740 NR BP CL2 OP W9 T60E**

**THORN**